


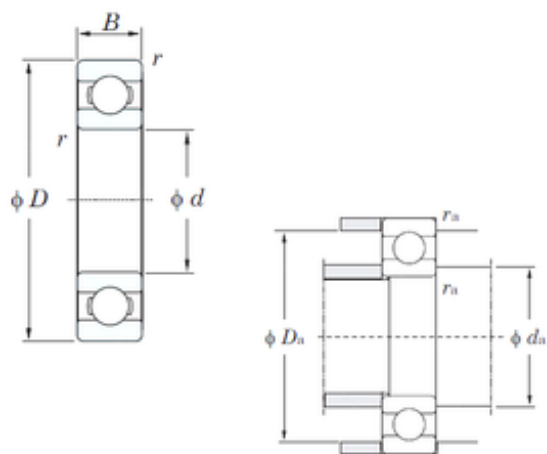

Bearing No. 16013

D	100 mm
d	65 mm
B	11 mm
C	11 mm
f0	16.5
Cu	0.830
Cr	21.4
C0r	16.0
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,3 Kg
r(min)	0.6
r min.	0,6 mm
da min.	69 mm
ra(max)	0.6
Da max.	96 mm
Da(max)	96
da(min)	69
ra max.	0,6 mm
Category	Single Row Ball Bearing
Oil lub.	7800
Inventory	0.0
Enclosure	Open
Size (mm)	65x100x11
Snap Ring	No
Width (mm)	11
Grease lub.	6600
Bearing No.	16013

Weight / LBS	0.66139
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	16013
Other Features	Deep Groove
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
(Refer.)Mass(kg)	0.300
Manufacturer URL	http://www.koyousa.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.433 Inch 11 Millimeter
Long Description	65MM Bore; 100MM Outside Diameter; 11MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outside Diameter	3.937 Inch 100 Millimeter
Manufacturer Name	KOYO
Weight / Kilogram	0
Internal Clearance	C0-Medium
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	7800 r/min
Internal Special Features	No

(Grease) Lubrication Speed	6600 r/min
Basic static load rating (C0)	16 kN
Basic dynamic load rating (C)	17,1 kN
Maximum Capacity / Filling Slot	No