


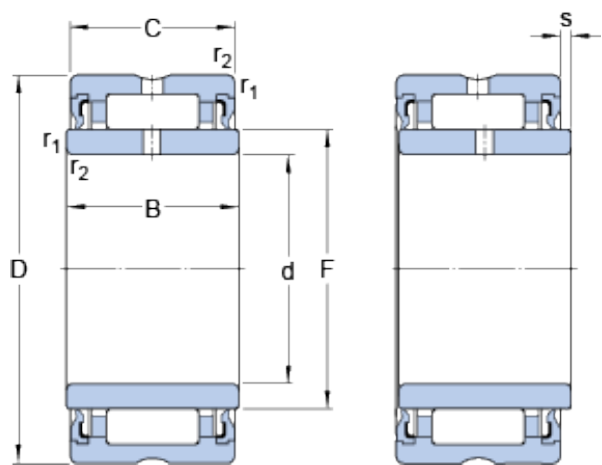

Bearing No. NA 4908.2RS

D	62 mm
d	40 mm
B	23 mm
C	22 mm
F	48 mm
s	0.5 mm
s max.	0.5 mm
UNSPSC	31171512
series:	NA
flanges:	With Flanges
Category	Roller Bearings
Size (mm)	62x40x23
Inventory	0.0
Width (mm)	23
maximum rpm:	4000 rpm
Mass bearing	0.25 kg
closure type:	Double Sealed
Product Group	B04144
seal material:	Nitrile
overall width:	23 mm
cage material:	Steel
Bearing number	NA 4908.2RS
bore diameter:	40 mm
Limiting speed	4000 r/min
number of rows:	One
Weight / Kilogram	0.261
outside diameter:	62 mm
precision rating:	Not Rated
bearing material:	Steel
Manufacturer Name	SKF

r_a max.	0.6 mm
D_a max.	58 mm
d_a min.	44 mm
Bore Diameter (mm)	62
Outer Diameter (mm)	40
$r_{1,2}$ min.	0.6 mm
Minimum Buy Quantity	N/A
d_a - min.	44 mm
D_a - max.	58 mm
r_a - max.	0.6 mm
needle bearing type:	Machined Bearing with Inner Ring
static load capacity:	58.5 kN
lubrication hole type:	Hole on Outer Ring
dynamic load capacity:	36.9 kN
$r_{1,2}$ - min.	0.6 mm
manufacturer upc number:	7316577012166
Basic dynamic load rating C	36.9 kN
operating temperature range:	-40 to +210 °F °F
Basic dynamic load rating - C	36.9 kN
Fatigue load limit P_u	7.1 kN
Fatigue load limit - P_u	7.1 kN
Basic static load rating C_0	58.5 kN
Basic static load rating - C_0	58.5 kN