




**Bearing No. NU2230-E-M1**

|                |                                                            |
|----------------|------------------------------------------------------------|
| E              | 242 mm                                                     |
| F              | 182 mm                                                     |
| d              | 150 mm                                                     |
| D              | 270 mm                                                     |
| B              | 73 mm                                                      |
| m              | 18,6 kg / Weight                                           |
| S              | 7,5 mm / Axial displacement facility from central position |
| Size (mm)      | 150x270x73                                                 |
| Width (mm)     | 73                                                         |
| $n_B$          | 1870 1/min                                                 |
| $n_G$          | 3950 1/min / Limiting speed                                |
| $D_1$          | 233,2 mm                                                   |
| $C_r$          | 780000 N / Dynamic load rating (radial)                    |
| $C_{Or}$       | 970000 N / Static load rating (radial)                     |
| Bearing number | NU2230-E-M1                                                |
| $C_{ur}$       | 153000 N / Fatigue limit load, radial                      |
| $r_{min}$      | 3 mm                                                       |
| $r_{1 min}$    | 3 mm                                                       |
| $r_{a max}$    | 2,5 mm                                                     |
| $d_{b min}$    | 184 mm                                                     |
| $d_{a min}$    | 164 mm                                                     |
| $d_{a max}$    | 179 mm                                                     |
| $D_{a max}$    | 256 mm                                                     |
| $r_{a1 max}$   | 2,5 mm                                                     |
|                |                                                            |

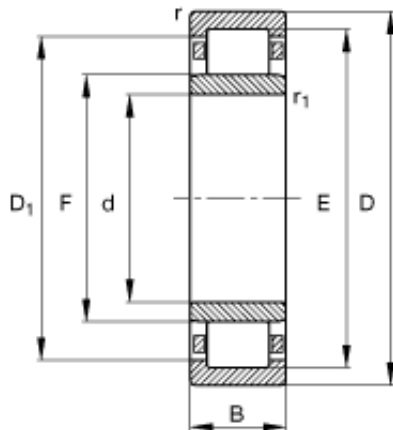

|                     |     |
|---------------------|-----|
| Bore Diameter (mm)  | 150 |
| Outer Diameter (mm) | 270 |