


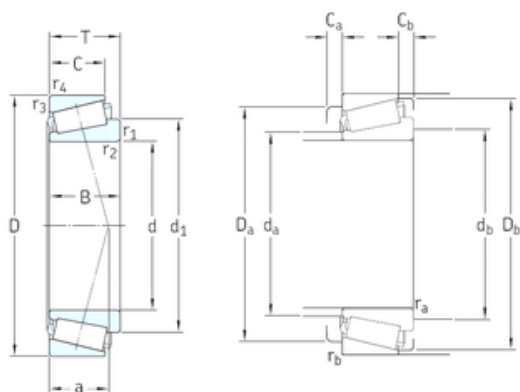

Bearing No. 33020/Q

D	150 mm
d	100 mm
T	39 mm
B	39 mm
C	32,5 mm
a	29 mm
d1	122 mm
db min	109 mm
Da min	135 mm
da max	108 mm
Weight	2,4 Kg
Cb min.	6,5 mm
Ca min.	7 mm
Db min.	143 mm
Da max.	141 mm
r1 min.	2 mm
r4 min.	1,5 mm
r3 min.	1,5 mm
r2 min.	2 mm
rb max.	1,5 mm
series:	330
ra max.	2 mm
Category	Ball Bearings
Size (mm)	100x150x39
Inventory	0.0
cup width:	32.5 mm
Width (mm)	39
cone width:	39 mm
maximum rpm:	4000 RPM
flange type:	Non-Flanged Cup

Product Group	B00152
closure type:	Open
assembly type:	Cone & Cup
bore diameter:	100 mm
cage material:	Steel
Bearing number	33020/Q
Limiting speed	4000 r/min
finish/coating:	Uncoated
Reference speed	3000 r/min
outside diameter:	150 mm
Manufacturer Name	SKF
Weight / Kilogram	2.448
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
static load capacity:	390 kN
dynamic load capacity:	224 kN
Calculation factor (e)	0,28
Calculation factor (Y)	2,1
Fatigue load limit (Pu)	41,5
operating temperature range:	Maximum of +250 °F
Basic static load rating (C0)	390 kN
Basic dynamic load rating (C)	224 kN