


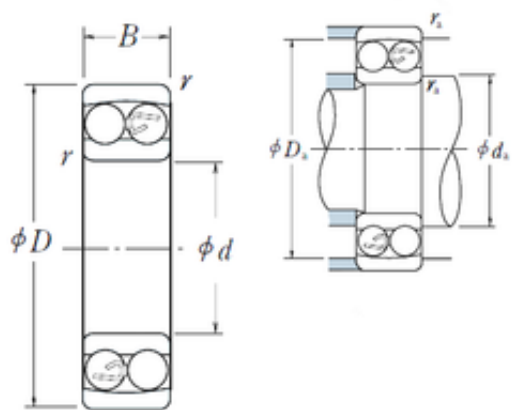

Bearing No. 1214

r	1.5
d	70 mm
D	125 mm
B	24 mm
C	24 mm
e	0.18
Y0	3.6
X1	1
B_	24
ra	1.5
Y2	5.3
D_	125
Y3	3.4
C0	13.8
X0	1
da	78
X2	0.65
PCD	96.1
D_a	117
SRI	6.25
SRE	0
mass	1.3
CAng	6.941
KBRG	1352
yobi	1214
SREX	0
SRIX	0.05
SRIN	0
SREN	0
r min.	1,5 mm

Weight	1,3 Kg
LangID	1
GRS rpm	4800
cyl dia	11.906
Oil rpm	5600
hidYobi	1214
da min.	78 mm
Da max.	117 mm
ra max.	1,5 mm
hidTable	ecat_NSSAB
cyl count	20
Size (mm)	70x125x24
Prod_Type3	SABB_SA_CB
Width (mm)	24
groove inner	84.189
groove outer	108.716
Bearing number	1214
Bore Diameter (mm)	70
Outer Diameter (mm)	125
Calculation factor (e)	0,18
(Oil) Lubrication Speed	5 600 r/min
Calculation factor (Y0)	3,6
Calculation factor (Y2)	5,3
(Grease) Lubrication Speed	4 800 r/min
Basic static load rating (C0)	13,8 kN
Basic dynamic load rating (C)	35 kN