


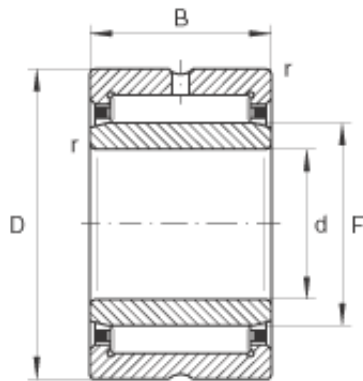

Bearing No. NA6905

s	1 mm / Axial displacement
D	42 mm
m	161 g / Weight
F	30 mm
B	30 mm
d	25 mm
Noun	Bearing
Bore	0.984 Inch 25 Millimeter
Width	1.181 Inch 30 Millimeter
UNSPSC	31171512
Retainer	Yes
Category	Needle Non Thrust Roller Bearing
Enclosure	Open
Component	Complete with Outer and Inner Ring
Separable	Inner Ring - Both Sides
Inventory	0.0
Size (mm)	25x42x30
Width (mm)	30
Closed End	No
Weight / LBS	0.355
n_B	7700 1/min / Reference speed
Inch - Metric	Metric
Product Group	B04144
n_G	14400 1/min / Limiting speed
C_r	44000 N / Dynamic load rating (radial)

Self Aligning	No
Other Features	Plain Inner Ring 2 Rib Outer Ring Precision Bearing Steel Cage Ground Raceway with Rib Oil Hole
Bearing number	NA6905
Keyword String	Needle
Thrust Bearing	No
C _{ur}	10600 N / Fatigue limit load, radial
C _{Or}	59000 N / Static load rating (radial)
Relubricatable	Yes
Rolling Element	Needle Roller Bearing
r _{min}	0,3 mm
Manufacturer URL	http://www.ina.com
Long Description	25MM Bore; 42MM Outside Diameter; 30MM Width; Needle Roller Bearing; Complete with Outer and Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; Inner Ring - Both Sides Sepa
Outside Diameter	1.654 Inch 42 Millimeter
Weight / Kilogram	0.16
Manufacturer Name	SCHAEFFLER GROUP
Bore Diameter (mm)	25
Outer Diameter (mm)	42
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.40.00.00
Manufacturer Item	NA6905

Number	
Number of Rows of Rollers	Single Row