


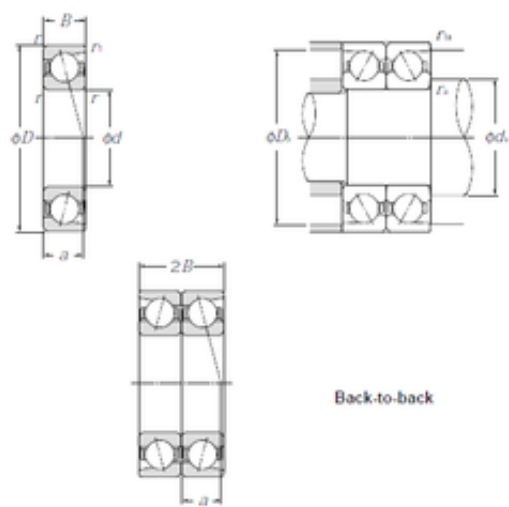

Bearing No. 7906DB

C	9 mm
a	15,5 mm
d	30 mm
D	47 mm
B	9 mm
2B	18 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Width	0.709 Inch 18 Millimeter
UNSPSC	31171531
Db max	45,8 mm
r min.	0,3 mm
Weight	0,116 Kg
r1 min.	0,15 mm
da min.	32,5 mm
ra max.	0,3 mm
Category	Angular Contact Ball Bearing
ra1 max.	0,15 mm
Inventory	0.0
Size (mm)	30x47x9
Snap Ring	No
Enclosure	Open
Width (mm)	9
Flush Ground	Yes
Inch - Metric	Metric
Contact Angle	30 Degree
Cage Material	Steel
Product Group	B00308

Keyword String	Angular Contact
Bearing number	7906DB
Rolling Element	Ball Bearing
Angle (?)	25 °
Precision Class	ABEC 1 ISO P0
Outside Diameter	1.85 Inch 47 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	30MM Bore; 47MM Outside Diameter; 18MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 30 Degree; 2 (1 Pair); D
Weight / Kilogram	0
Manufacturer Name	NTN
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
Number of Bearings	2 (1 Pair)
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Mounting Arrangement	Duplex-Back to Back
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	12 000 r/min
Basic dynamic load rating (C)	12,3 kN
Basic static load rating (C0)	11,5 kN
Maximum Capacity / Filling Slot	No