


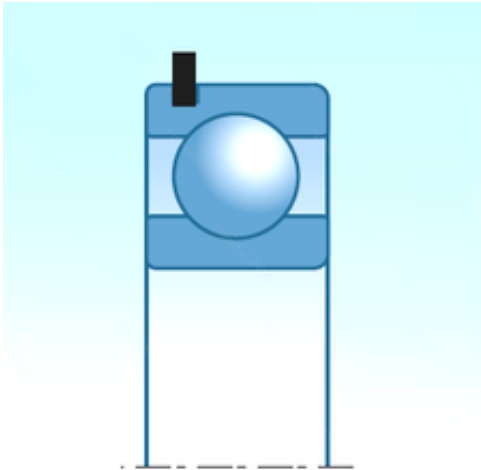

Bearing No. 6201LLUNR

C	10,000 mm
d	12,000 mm
B	10,000 mm
D	32,000 mm
Noun	Bearing
Bore	0.472 Inch 12 Millimeter
UNSPSC	31171504
series:	62
Category	Single Row Ball Bearing
Enclosure	2 Seals
Size (mm)	12x32x10
Snap Ring	Yes
Inventory	0.0
Width (mm)	10,000
bore type:	Round
maximum rpm:	26000 RPM
Weight / LBS	0.086
Cage Material	Steel
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Bearing number	6201LLUNR
bore diameter:	12 mm
overall width:	10 mm
fillet radius:	0.6 mm
cage material:	Steel
Keyword String	Ball
Enclosure Type	Contact Seal
Precision Class	ABEC 1 ISO P0

Rolling Element	Ball Bearing
finish/coating:	Uncoated
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.394 Inch 10 Millimeter
Outside Diameter	1.26 Inch 32 Millimeter
Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer Name	NTN
outer ring width:	10 mm
inner ring width:	10 mm
Weight / Kilogram	0.039
bearing material:	High Carbon Chrome Steel
outside diameter:	32 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	12,000
Outer Diameter (mm)	32,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	16000 rpm
static load capacity:	2750 N
dynamic load capacity:	6100 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6201LLUNR/3E

Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No