


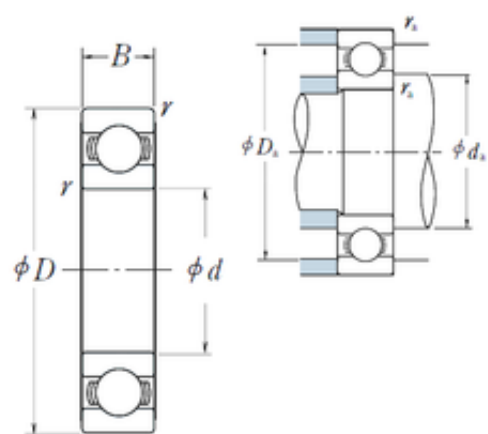

Bearing No. 6205

D	52 mm
d	25 mm
B	15 mm
C	15 mm
r	1
Z_	9
D_	52
ra	1
C0	7.85
fo	13.9
B_	15
DI_	31.062
SRI	4.01
SRE	4.21
D_a	47
DA_	7.938
DE_	46.938
SREX	0.04
SREN	0
SBRG	2
KBRG	6101
mass	0.129
Bore	0.984 Inch 25 Millimeter
SRIX	0.02
SRIN	0
Noun	Bearing
yobi	6205
SDM_	39
bomp	0

Weight	0,129 Kg
C_conv	14000
LangID	1
da min	30
r min.	1 mm
ALPHA_	0
UNSPSC	31171504
da max	32 mm
GRS rpm	13000
Oil rpm	15000
hidYobi	6205
ra max.	1 mm
Da max.	47 mm
da min.	30 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	25x52x15
Inventory	9.0
Enclosure	Open
Snap Ring	No
Prod_Type3	DGBB_SR_OT
Width (mm)	15
bore type:	Round
Weight / LBS	0.29
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
closure type:	Open
Bearing number	6205
Keyword String	Ball
overall width:	15 mm
bore diameter:	25 mm

Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	25MM Bore; 52MM Outside Diameter; 15MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.591 Inch 15 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.047 Inch 52 Millimeter
outside diameter:	52 mm
Manufacturer Name	NSK
Weight / Kilogram	0.13
Bore Diameter (mm)	25
Internal Clearance	C0-Medium
internal clearance:	Normal Clearance
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	15 000 r/min
Manufacturer Item Number	6205
manufacturer upc number:	029176014321
Internal Special Features	No
(Grease) Lubrication Speed	13 000 r/min
Basic static load rating (C0)	7,85 kN
Basic dynamic load	14 kN

rating (C)	
Maximum Capacity / Filling Slot	No