


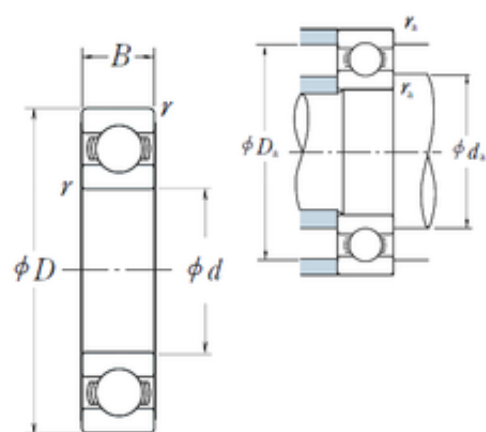

Bearing No. 16017

D	130 mm
d	85 mm
B	14 mm
C	14 mm
r	0.6
B_	14
Z_	18
D_	130
ra	0.6
C0	31.5
fo	16.5
SRI	5.34
SRE	5.34
D_a	126
DE_	117.819
DA_	10.319
DI_	97.181
Noun	Bearing
SREX	0.025
yobi	16017
SBRG	0
bomp	0
KBRG	6101
SDM_	107.5
mass	0.652
Bore	3.346 Inch 85 Millimeter
SREN	-0.025
SRIX	0.025
SRIN	-0.025

UNSPSC	31171504
LangID	1
r min.	0,6 mm
C_conv	33000
ALPHA_	0
da min	89
Weight	0,652 Kg
Da max.	126 mm
Oil rpm	6000
ra max.	0,6 mm
da min.	89 mm
hidYobi	16017
GRS rpm	5000
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Inventory	0.0
Enclosure	Open
Snap Ring	No
Size (mm)	85x130x14
Width (mm)	14
Prod_Type3	DGBB_SR_OT
bore type:	Round
Weight / LBS	1.433
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
closure type:	Open
Bearing number	16017
Keyword String	Ball
overall width:	14 mm
bore diameter:	85 mm
Rolling Element	Ball Bearing

Precision Class	ABEC 1 ISO P0
Long Description	85MM Bore; 130MM Outside Diameter; 14MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	5.118 Inch 130 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.551 Inch 14 Millimeter
Manufacturer Name	NSK
outside diameter:	130 mm
Weight / Kilogram	0.65
Internal Clearance	C0-Medium
Bore Diameter (mm)	85
Outer Diameter (mm)	130
internal clearance:	Normal Clearance
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	6 000 r/min
manufacturer upc number:	029176059506
Internal Special Features	No
(Grease) Lubrication Speed	5 000 r/min
Basic static load rating (C0)	31,5 kN
Basic dynamic load rating (C)	33 kN
Maximum Capacity / Filling Slot	No

