


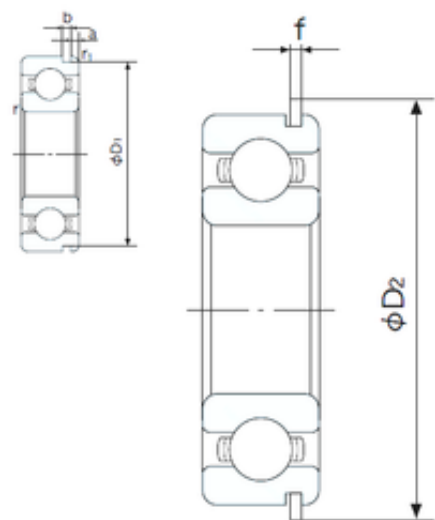

Bearing No. 6206NR

D	62 mm
d	30 mm
B	16 mm
C	16 mm
a	3.28 mm
b	1.9 mm
f	1.7 mm
D1	59.61 mm
r1	0.5 mm
D2	67.7 mm
Width	16 mm
UNSPSC	31171504
Weight	0.199 Kg
r min.	1 mm
r1 min.	0.5 mm
b (min)	1.9 mm
a (max)	3.3 mm
Da (max)	56 mm
da (min)	36 mm
Category	Ball Bearings
Dx (min)	68.5 mm
ra (max)	1 mm
D1 (max)	59.6 mm
Cy (max)	4.6 mm
Factor fo	13.9
Inventory	16.0
Size (mm)	30x62x16
Bore Type	Cylindrical Bore
Enclosure	Snap Ring Groove with Snap Ring

Bore Size	30 mm
Width (mm)	16
Product Group	B00308
Configuration	Single Row
Bearing number	6206NR
Snap Ring Width	1.7 mm
Radial Clearance	0.005 to 0.020 mm
Outside Diameter	62 mm
Weight / Kilogram	0.2
Manufacturer Name	NACHI
Bore Diameter (mm)	30
Static Load Rating	11,300 N
Dynamic Load Rating	19,500 N
Outer Diameter (mm)	62
Minimum Buy Quantity	N/A
Limiting Speed - Oil	13,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	11,000 rpm
(Grease) Lubrication Speed	10000 r/min
Snap Ring Outside Diameter	67.7 mm
Basic static load rating (C0)	11,3 kN
Basic dynamic load rating (C)	19,5 kN