


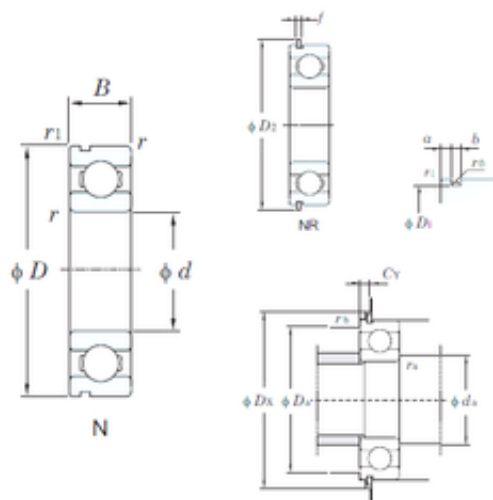

Bearing No. 6208NR

f	1,65 mm
d	40 mm
D	80 mm
B	18 mm
C	18 mm
a	3,28 mm
b	2,05 mm
Cr	36.4
f0	14.0
Cu	1.25
D2	86,6 mm
D1	76,81 mm
C0r	17.8
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
r min.	1,1 mm
r(min)	1.1
UNSPSC	31171504
Weight	0,366 Kg
r1(min)	0.5
da(min)	46.5
D2(min)	86.6
Da(max)	73.5
rb(max)	0.5
ra(max)	1
Dx(min)	88
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	46,5 mm

Cy(max)	4.67
Da max.	73,5 mm
Category	Single Row Ball Bearing
Oil lub.	10000
Snap Ring	Yes
Size (mm)	40x80x18
Inventory	0.0
Enclosure	Open
Width (mm)	18
Grease lub.	8300
f{0.05)	1.65
Bearing No.	6208NR
Weight / LBS	0.80689
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6208NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
(Refer.)Mass(kg)	0.366
Inner Race Width	0 Inch 0 Millimeter

Outside Diameter	3.15 Inch 80 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Weight / Kilogram	0.396
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	10000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	8300 r/min
Basic static load rating (C0)	17,8 kN
Basic dynamic load rating (C)	29,1 kN
Maximum Capacity / Filling Slot	No