


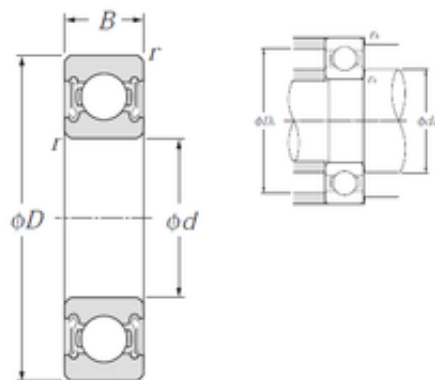

Bearing No. 6208LLB

C	18 mm
d	40 mm
D	80 mm
B	18 mm
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
Weight	0,366 Kg
da max	51 mm
UNSPSC	31171504
r min.	1,1 mm
da min.	46,5 mm
ra max.	1 mm
series:	62
Da max.	73,5 mm
Category	Single Row Ball Bearing
Enclosure	2 Seals
Size (mm)	40x80x18
Inventory	0.0
Snap Ring	No
Width (mm)	18
bore type:	Round
maximum rpm:	10000 RPM
Weight / LBS	0.813
Cage Material	Steel
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
bore diameter:	40 mm
Keyword String	Ball

overall width:	18 mm
cage material:	Steel
fillet radius:	1.1 mm
Bearing number	6208LLB
Enclosure Type	Non-Contact Seal
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	3.15 Inch 80 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
bearing material:	High Carbon Chrome Steel
outer ring width:	18 mm
inner ring width:	18 mm
Manufacturer Name	NTN
Weight / Kilogram	0.368
precision rating:	ISO Class 0
outside diameter:	80 mm
Bore Diameter (mm)	40
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring
Outer Diameter (mm)	80
internal clearance:	CN
Minimum Buy Quantity	N/A

static load capacity:	17800 N
maximum rpm (grease):	8700 rpm
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	29100 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6208LLB
Internal Special Features	No
(Grease) Lubrication Speed	8 700 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	29,1 kN
Basic static load rating (C0)	17,8 kN
Maximum Capacity / Filling Slot	No