




Bearing No. 7208B

D	80 mm
d	40 mm
B	18 mm
C	18 mm
a	34.2 mm
Cu	1.40
Cr	40.2
f0	-
C0r	23.0
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Width	0.709 Inch 18 Millimeter
a(mm)	34.2
UNSPSC	31171531
r(min)	1.1
Weight	0.382 Kg
r min.	1.1 mm
ra max.	1 mm
Da(max)	73
ra(max)	1
Da max.	73 mm
da min.	47 mm
r1 min.	0.6 mm
da(min)	47
r1(min)	0.6
Category	Angular Contact Ball Bearing
Oil lub.	8000
Snap Ring	No

Enclosure	Open
Size (mm)	40x80x18
Inventory	0.0
Width (mm)	18
Bearing No.	7208B
Grease lub.	6000
Flush Ground	No
Contact Angle	40 Degree
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7208B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	0.382
Outside Diameter	3.15 Inch 80 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	80

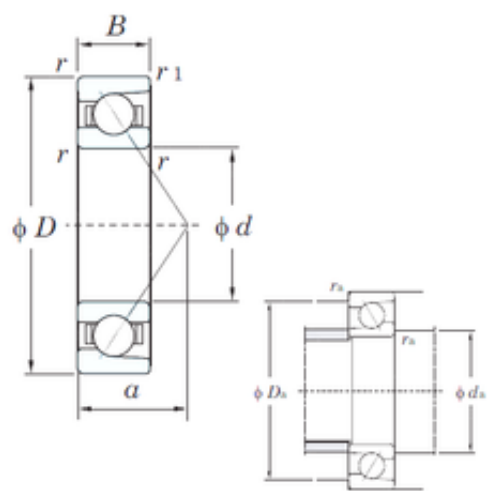

Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	7500 r/min
Maximum Capacity / Filling Slot	No