


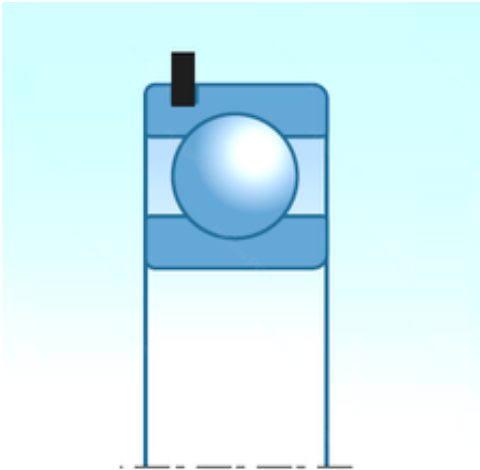

Bearing No. 6210ZNR

D	90,000 mm
d	50,000 mm
B	20,000 mm
C	20,000 mm
Bore	1.969 Inch 50 Millimeter
Noun	Bearing
UNSPSC	31171504
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	50x90x20
Snap Ring	Yes
Enclosure	1 Metal Shield
bore type:	Round
Width (mm)	20,000
Weight / LBS	1.02
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Single Shield
bore diameter:	50 mm
overall width:	20 mm
cage material:	Steel
fillet radius:	1.1 mm
Bearing number	6210ZNR
Keyword String	Ball
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	50MM Bore; 90MM Outside Diameter;

	20MM Outer Race Diameter; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
outer ring width:	20 mm
inner ring width:	20 mm
Manufacturer Name	NTN
Weight / Kilogram	0.458
bearing material:	High Carbon Chrome Steel
outside diameter:	90 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	50,000
maximum rpm (oil):	8300 rpm
Internal Clearance	C3-Loose
Outer Diameter (mm)	90,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	7100 rpm
static load capacity:	23200 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	35000 N
Manufacturer Item Number	6210ZNR
Internal Special	No

Features	
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No