


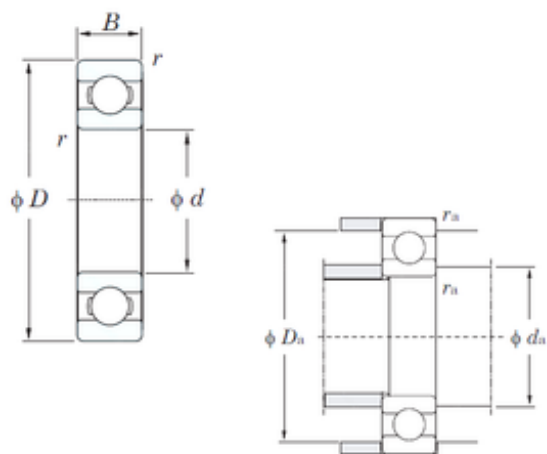

Bearing No. 6214

D	125 mm
d	70 mm
B	24 mm
C	24 mm
f0	14.5
Cu	2.90
Cr	77.8
C0r	44.1
Bore	2.756 Inch 70 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	1,07 Kg
r(min)	1.5
r min.	1,5 mm
da min.	78 mm
ra(max)	1.5
Da max.	117 mm
Da(max)	117
da(min)	78
ra max.	1,5 mm
Category	Single Row Ball Bearing
Oil lub.	6100
Inventory	0.0
Enclosure	Open
Size (mm)	70x125x24
Snap Ring	No
Width (mm)	24
Grease lub.	5100
Bearing No.	6214

Weight / LBS	2.554
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6214
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.945 Inch 24 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
(Refer.)Mass(kg)	1.07
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	1.16
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	70
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	6100 r/min
Manufacturer Item Number	6214
Internal Special Features	No
(Grease) Lubrication Speed	5100 r/min

Basic static load rating (C0)	44,1 kN
Basic dynamic load rating (C)	62,2 kN
Maximum Capacity / Filling Slot	No