


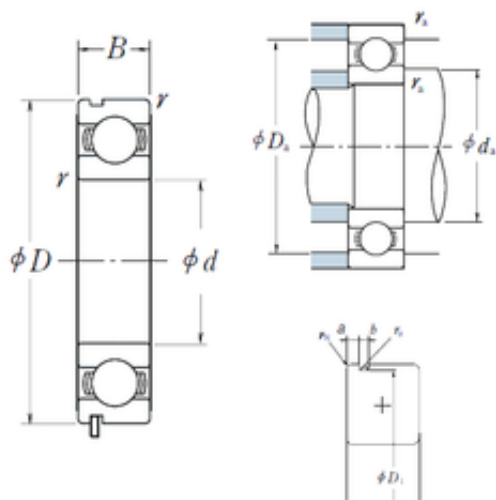

Bearing No. 6214N

a	4,06 mm
r	1.5
d	70 mm
D	125 mm
B	24 mm
C	24 mm
b	3,1 mm
fo	14.5
B_	24
ra	1.5
C0	44
D1	120,22 mm
D_	125
Z_	10
rn	0,5 mm
ro	0.6
DE_	114.962
SRI	9.04
D_a	117
DA_	17.462
SRE	9.04
DI_	80.038
yobi	6214N
mass	1.09
SBRG	2
bomp	0
KBRG	6101
SREX	0.03
SREN	-0.03
SRIN	-0.03

SDM_	97.5
SRIX	0.03
ALPHA_	0
r min.	1,5 mm
C_conv	62000
da max	84 mm
da min	78
Weight	1,09 Kg
LangID	1
ra max.	1,5 mm
Da max.	117 mm
Oil rpm	6300
da min.	78 mm
r0 max.	0,6 mm
hidYobi	6214N
GRS rpm	5000
hidTable	ecat_NSRDGB
Size (mm)	70x125x24
Prod_Type3	DGBB_SR_N_OT
Width (mm)	24
Bearing number	6214N
Bore Diameter (mm)	70
Outer Diameter (mm)	125
(Oil) Lubrication Speed	6 300 r/min
(Grease) Lubrication Speed	5 000 r/min
Basic dynamic load rating (C)	62 kN
Basic static load rating (C0)	44 kN