


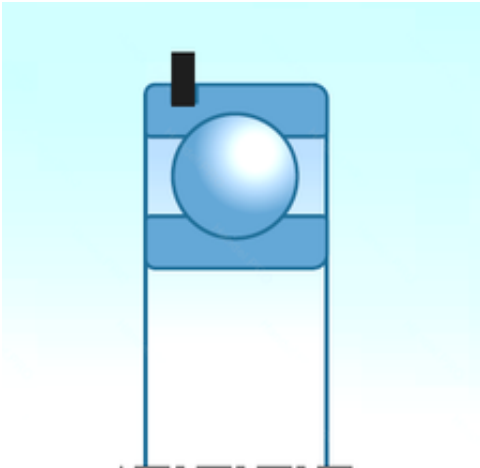

Bearing No. 6214ZNR

D	125,000 mm
d	70,000 mm
B	24,000 mm
C	24,000 mm
Bore	2.756 Inch 70 Millimeter
Noun	Bearing
UNSPSC	31171504
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	70x125x24
Snap Ring	Yes
Enclosure	1 Metal Shield
bore type:	Round
Width (mm)	24,000
Weight / LBS	2.36
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Single Shield
bore diameter:	70 mm
overall width:	24 mm
cage material:	Steel
fillet radius:	1.5 mm
Bearing number	6214ZNR
Keyword String	Ball
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	70MM Bore; 125MM Outside Diameter;

	24MM Outer Race Diameter; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	4.921 Inch 125 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
outer ring width:	24 mm
inner ring width:	24 mm
Manufacturer Name	NTN
Weight / Kilogram	1.07
bearing material:	High Carbon Chrome Steel
outside diameter:	125 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	70,000
maximum rpm (oil):	6000 rpm
Internal Clearance	C3-Loose
Outer Diameter (mm)	125,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	5100 rpm
static load capacity:	44000 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	62000 N
Manufacturer Item Number	6214ZNR
Internal Special	No

Features	
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No