




Bearing No. 7312B

D	130 mm
d	60 mm
B	31 mm
C	31 mm
a	55.8 mm
Cu	4.30
Cr	113
f0	-
C0r	65.8
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
a(mm)	55.8
Width	1.22 Inch 31 Millimeter
Weight	1.81 Kg
r min.	2.1 mm
UNSPSC	31171531
r(min)	2.1
da(min)	72
r1 min.	1.1 mm
Da max.	118 mm
r1(min)	1.1
Da(max)	118
ra max.	2 mm
ra(max)	2
da min.	72 mm
Category	Angular Contact Ball Bearing
Oil lub.	4900
Inventory	0.0
Enclosure	Open

Size (mm)	60x130x31
Snap Ring	No
Width (mm)	31
Bearing No.	7312B
Grease lub.	3600
Flush Ground	No
Contact Angle	40 Degree
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7312B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	1.81
Outside Diameter	5.118 Inch 130 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	60MM Bore; 130MM Outside Diameter; 31MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Outer Diameter (mm)	130

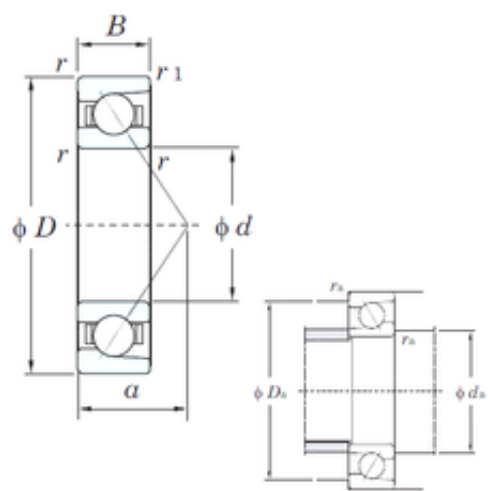

Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	4600 r/min
Maximum Capacity / Filling Slot	No