


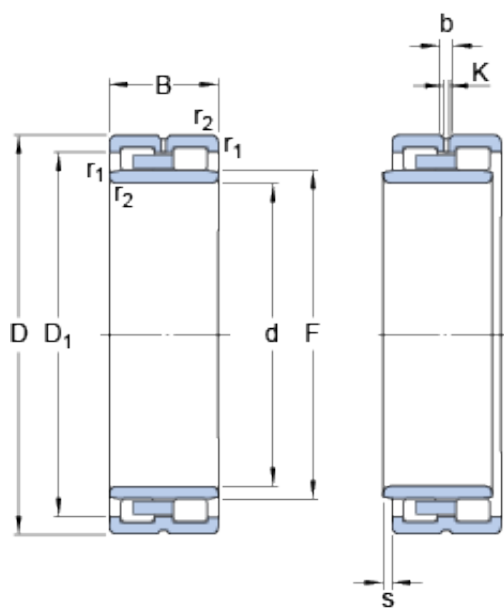

Bearing No. NNU 4956 B/SPW33

F	312 mm
b	13.9 mm
d	280 mm
D	380 mm
B	100 mm
s	4.5 mm
K	3 mm
s max.	4.5 mm
Category	Bearings
Inventory	0.0
Size (mm)	280x380x100
Width (mm)	100
Mass bearing	32.5 kg
d _n	313.5 mm
D ₁	345.6 mm
D ₁	345.6 mm
Product Group	B04270
d _n	313.5 mm
Bearing number	NNU 4956 B/SPW33
G _{ref}	384 cm
Weight / Kilogram	0
Manufacturer Name	SKF
Bore Diameter (mm)	280
r _a max.	2 mm
D _a max.	369 mm
d _b min.	316 mm
d _a max.	308 mm
d _a min.	291 mm
Outer Diameter (mm)	380
r _{1,2} min.	2.1 mm

r_a - max.	2 mm
d_a - min.	291 mm
Minimum Buy Quantity	N/A
d_a - max.	308 mm
d_b - min.	316 mm
D_a - max.	369 mm
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	765 kN
Basic dynamic load rating - C	765 kN
Fatigue load limit P_u	170 kN
Limiting speed for oil lubrication	2200 mm/min
Fatigue load limit - P_u	170 kN
Limiting speed for grease lubrication	1900 r/min
Basic static load rating C_0	1800 kN
Attainable speed for grease lubrication	1900 r/min
Attainable speed for oil-air lubrication	2200 r/min
Basic static load rating - C_0	1800 kN
Reference grease quantity G_{ref}	384 cm ³
Static radial stiffness (guideline value)	7260 N/ μ m