


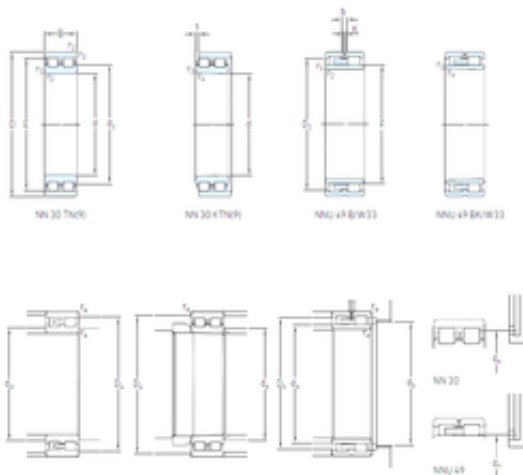

Bearing No. NNU 4938 B/SPW33

S	1,1 mm
b	8,3 mm
K	3 mm
F	212 mm
d	190 mm
D	260 mm
B	69 mm
C	69 mm
dh	213 mm
D1	236 mm
Weight	11 Kg
s max.	1.1 mm
da max	209 mm
db min	215 mm
r1 min.	2 mm
r3 min.	1 mm
r4 min.	1 mm
da min.	200 mm
Da max.	250 mm
ra max.	2 mm
r2 min.	2 mm
Category	Bearings
Size (mm)	190x260x69
Inventory	0.0
Width (mm)	69
Mass bearing	11 kg
D ₁	236 mm
d _n	213 mm
Product Group	B04270
Bearing number	NNU 4938 B/SPW33

Manufacturer Name	SKF
Weight / Kilogram	11.44
D _a max.	250 mm
Bore Diameter (mm)	190
r _a max.	2 mm
d _a min.	200 mm
d _a max.	209 mm
d _b min.	215 mm
Outer Diameter (mm)	260
Minimum Buy Quantity	N/A
r _{1,2} min.	2 mm
(Oil) Lubrication Speed	3 200 r/min
(Grease) Lubrication Speed	2 800 r/min
Basic dynamic load rating C	402 kN
Basic dynamic load rating (C)	402 kN
Basic static load rating (C ₀)	880 kN
Fatigue load limit P _u	90 kN
Basic static load rating C ₀	880 kN
Attainable speed for grease lubrication	2800 r/min
Attainable speed for oil-air lubrication	3200 r/min
Reference grease quantity G _{ref}	85 cm ³
Static radial stiffness (guideline value)	5380 N/μm