




Bearing No. 7218B

D	160 mm
d	90 mm
B	30 mm
C	30 mm
a	67.4 mm
Cu	4.90
Cr	133
f0	-
C0r	93.8
Noun	Bearing
Bore	3.543 Inch 90 Millimeter
a(mm)	67.4
Width	1.181 Inch 30 Millimeter
Weight	2.30 Kg
r min.	2 mm
UNSPSC	31171531
r(min)	2
da(min)	100
r1 min.	1 mm
Da max.	150 mm
r1(min)	1
ra max.	2 mm
Da(max)	150
ra(max)	2
da min.	100 mm
Category	Angular Contact Ball Bearing
Oil lub.	3700
Inventory	0.0

Enclosure	Open
Size (mm)	90x160x30
Snap Ring	No
Width (mm)	30
Grease lub.	2800
Bearing No.	7218B
Flush Ground	No
Contact Angle	40 Degree
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7218B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	2.30
Outside Diameter	6.299 Inch 160 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	90MM Bore; 160MM Outside Diameter; 30MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	90

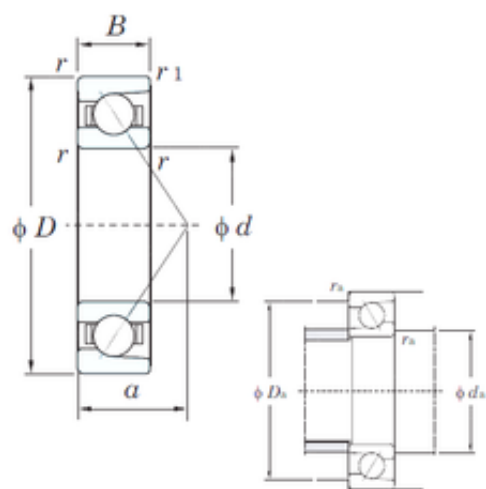

Outer Diameter (mm)	160
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	3500 r/min
Maximum Capacity / Filling Slot	No