




Bearing No. 7219B

a	71.6 mm
d	95 mm
D	170 mm
B	32 mm
C	32 mm
Cr	145
f0	-
Cu	5.10
C0r	101
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
Width	1.26 Inch 32 Millimeter
a(mm)	71.6
UNSPSC	31171531
r(min)	2.1
r min.	2.1 mm
Weight	2.78 Kg
da min.	107 mm
ra(max)	2
ra max.	2 mm
r1 min.	1.1 mm
Da max.	158 mm
da(min)	107
r1(min)	1.1
Da(max)	158
Category	Angular Contact Ball Bearing
Oil lub.	3500
Snap Ring	No
Enclosure	Open

Size (mm)	95x170x32
Inventory	0.0
Width (mm)	32
Bearing No.	7219B
Grease lub.	2600
Flush Ground	No
Contact Angle	40 Degree
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7219B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	2.78
Outside Diameter	6.693 Inch 170 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	95MM Bore; 170MM Outside Diameter; 32MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
Outer Diameter (mm)	170

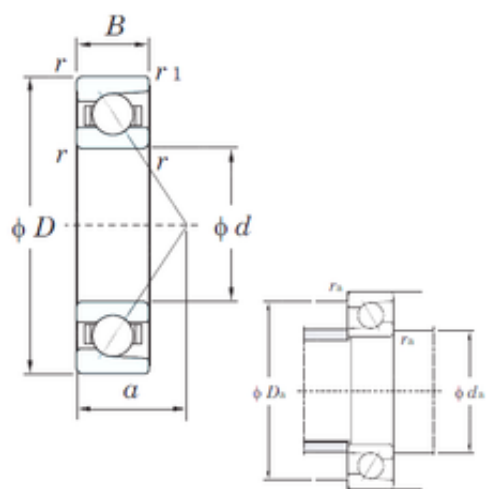

Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	3300 r/min
Maximum Capacity / Filling Slot	No