


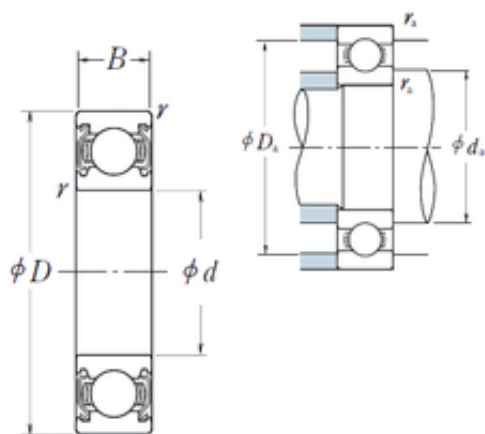

Bearing No. 6222ZZ

r	2.1
d	110 mm
D	200 mm
B	38 mm
C	38 mm
Z_	10
B_	38
D_	200
fo	14.3
ra	2
C0	117
DI_	126.425
DE_	183.575
DA_	28.575
D_a	189
SRI	14.79
SRE	14.79
Bore	4.331 Inch 110 Millimeter
SRIN	-0.05
Noun	Bearing
bomp	0
SREN	-0.05
SREX	0.05
SRIX	0.05
mass	4.45
KBRG	6141
SBRG	2
yobi	6222ZZ
SDM_	155

Weight	4,45 Kg
LangID	1
r min.	2,1 mm
ALPHA_	0
UNSPSC	31171504
da min	121
C_conv	144000
da max	134 mm
da min.	121 mm
GRS rpm	2800
hidYobi	6222ZZ
ra max.	2 mm
Da max.	189 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	2 Metal Shields
Size (mm)	110x200x38
Inventory	0.0
Snap Ring	No
Width (mm)	38
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	4.35
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6222ZZ
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	7.874 Inch 200 Millimeter

Outer Race Width	1.496 Inch 38 Millimeter
Long Description	110MM Bore; 200MM Outside Diameter; 38MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer Name	NSK
Weight / Kilogram	4.5
Internal Clearance	C0-Medium
Bore Diameter (mm)	110
Outer Diameter (mm)	200
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6222ZZ
Internal Special Features	No
(Grease) Lubrication Speed	2 800 r/min
Basic static load rating (C0)	117 kN
Basic dynamic load rating (C)	144 kN
Maximum Capacity / Filling Slot	No