


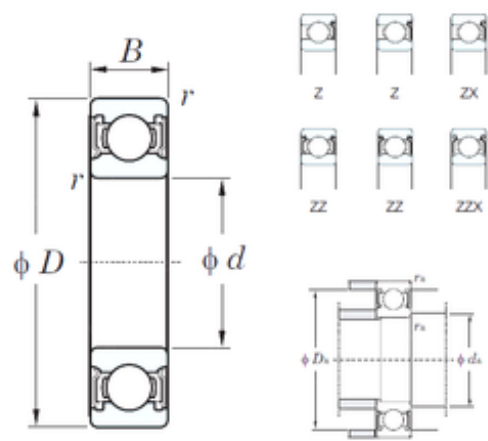

Bearing No. 6222ZZX

D	200 mm
d	110 mm
B	38 mm
C	38 mm
Noun	Bearing
Bore	4.331 Inch 110 Millimeter
r min.	2,1 mm
da max	136,5 mm
UNSPSC	31171504
Weight	4,36 Kg
ra max.	2 mm
Da max.	189 mm
da min.	121 mm
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Inventory	0.0
Size (mm)	110x200x38
Snap Ring	No
Width (mm)	38
Weight / LBS	9.61214
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Other Features	Removable Shield
Bearing number	6222ZZX
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com

Outside Diameter	7.874 Inch 200 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	110MM Bore; 200MM Outside Diameter; 38MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Outer Race Width	1.496 Inch 38 Millimeter
Manufacturer Name	KOYO
Weight / Kilogram	0
Internal Clearance	C0-Medium
Bore Diameter (mm)	110
Outer Diameter (mm)	200
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	3100 r/min
Basic static load rating (C0)	117 kN
Basic dynamic load rating (C)	144 kN
Maximum Capacity / Filling Slot	No