


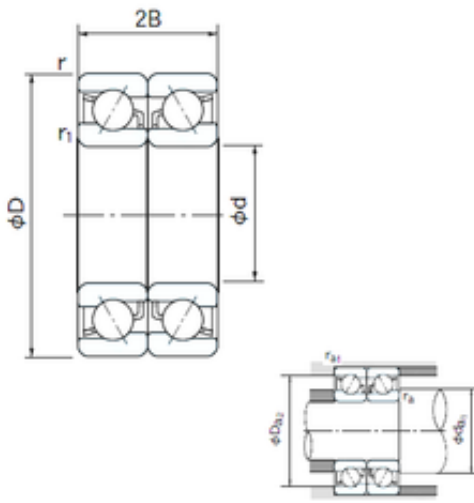

Bearing No. 7302BDB

D	42 mm
a	5.5 mm
C	13 mm
B	13 mm
d	15 mm
r1	0.6 mm
2B	26 mm
Width	13 mm
r min.	1 mm
Weight	0.085 Kg
ra max.	0.6 mm
r1 min.	0.6 mm
da min.	18 mm
Da max.	38.4 mm
ra (max)	1 mm
da1 (min)	21 mm
Bore Size	15 mm
Enclosure	Open
Bore Type	Cylindrical Bore
ra1 (max)	0.6 mm
Size (mm)	15x42x13
da2 (min)	18 mm
Da2 (max)	38.4 mm
Da1 (max)	36 mm
Width (mm)	13
Configuration	Duplex
Bearing number	7302BDB
Angle (?)	40 °
Outside Diameter	42 mm
Static Load Rating	13,500 N

Bore Diameter (mm)	15
Dynamic Load Rating	21,000 N
Outer Diameter (mm)	42
Limiting Speed - Oil	16,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	11,000 rpm
(Grease) Lubrication Speed	11000 r/min
Basic dynamic load rating (C)	21 kN
Basic static load rating (C0)	13,5 kN