


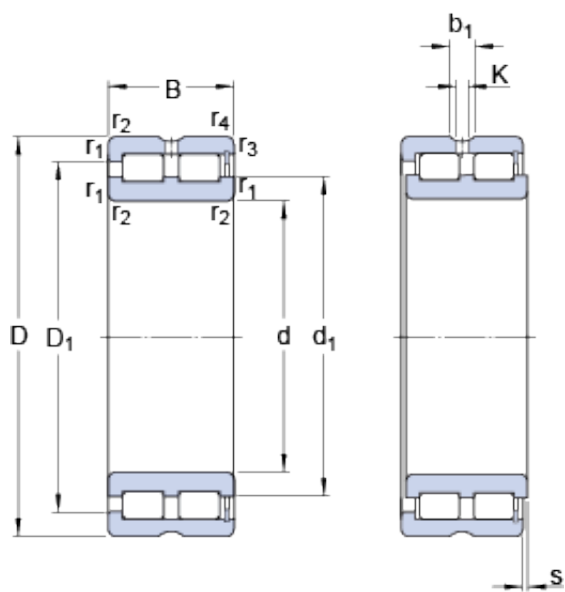

Bearing No. NNCF 5076 CV

D	560 mm
d	380 mm
B	243 mm
K	5 mm
s	11 mm
s max.	11 mm
Size (mm)	560x380x243
Width (mm)	243
Mass bearing	200 kg
d ₁	431 mm
D ₁	504 mm
b ₁	9.4 mm
b ₁	9.4 mm
d _{as}	417 mm
Limiting speed	560 r/min
Bearing number	NNCF 5076 CV
d _{as}	417 mm
Reference speed	450 r/min
r _b max.	4 mm
r _a max.	4 mm
D _a max.	539 mm
Bore Diameter (mm)	560
d _a min.	403 mm
Outer Diameter (mm)	380
d _a - min.	403 mm
r _b - max.	4 mm
r _a - max.	4 mm
D _a - max.	539 mm
r _{1,2} min.	5 mm

$r_{3,4}$ min.	5 mm
d_1 ?	485 mm
D_1 ?	531 mm
$r_{3,4}$ - min.	5 mm
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	4680 kN
Basic dynamic load rating - C	4570 kN
Fatigue load limit P_u	750 kN
Calculation factor k_r	0.5
Calculation factor - k_r	0.5
Fatigue load limit - P_u	750 kN
Basic static load rating C_0	9150 kN
Basic static load rating - C_0	9150 kN