


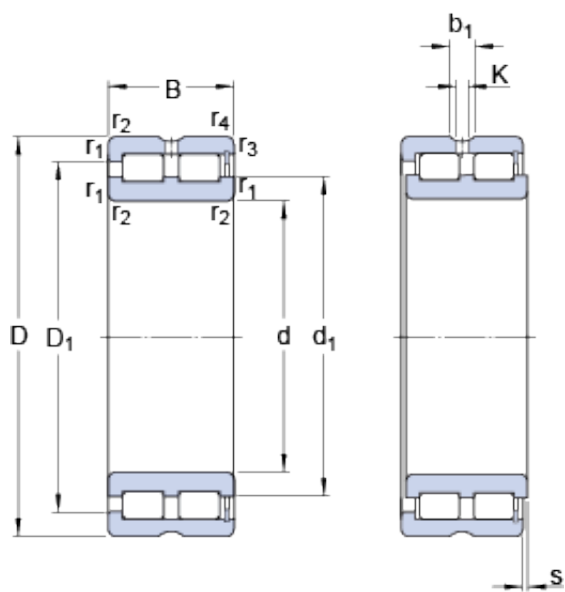

Bearing No. NNCF 4840 CV

D	250 mm
d	200 mm
B	50 mm
K	4 mm
s	4 mm
s max.	4 mm
Size (mm)	250x200x50
Width (mm)	50
Mass bearing	5.8 kg
d ₁	220 mm
D ₁	229.5 mm
b ₁	7 mm
b ₁	7 mm
d _{as}	213 mm
Limiting speed	1400 r/min
Bearing number	NNCF 4840 CV
d _{as}	213 mm
Reference speed	1100 r/min
r _b max.	1.5 mm
r _a max.	1.5 mm
D _a max.	243 mm
Bore Diameter (mm)	250
d _a min.	207 mm
Outer Diameter (mm)	200
d _a - min.	207 mm
r _b - max.	1.5 mm
r _a - max.	1.5 mm
D _a - max.	243 mm
r _{1,2} min.	1.5 mm

$r_{3,4}$ min.	1.5 mm
d_1 ?	220 mm
D_1 ?	229.5 mm
$r_{3,4}$ - min.	1.5 mm
$r_{1,2}$ - min.	1.5 mm
Basic dynamic load rating C	369 kN
Basic dynamic load rating - C	369 kN
Fatigue load limit P_u	80 kN
Calculation factor k_r	0.2
Calculation factor - k_r	0.2
Fatigue load limit - P_u	80 kN
Basic static load rating C_0	800 kN
Basic static load rating - C_0	800 kN