


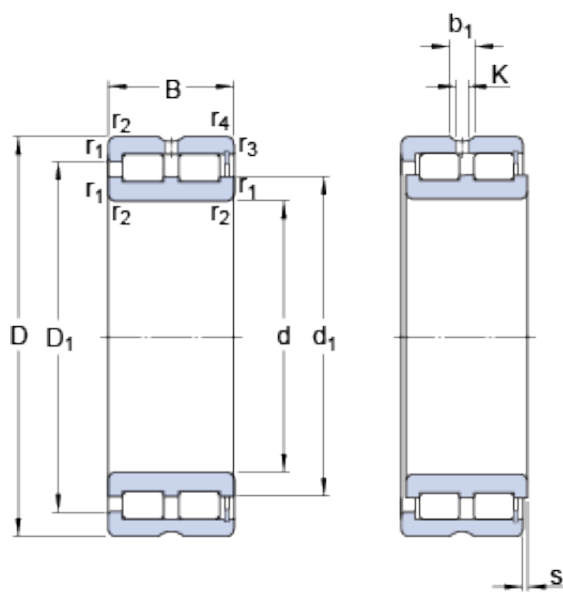

Bearing No. NNCF 5034 CV

D	260 mm
d	170 mm
B	122 mm
K	4 mm
s	6 mm
s max.	6 mm
Size (mm)	260x170x122
Width (mm)	122
Mass bearing	23 kg
d ₁	198.5 mm
D ₁	231.5 mm
b ₁	7 mm
b ₁	7 mm
d _{as}	193 mm
Limiting speed	1400 r/min
Bearing number	NNCF 5034 CV
d _{as}	193 mm
Reference speed	1100 r/min
r _b max.	1 mm
r _a max.	2 mm
D _a max.	251 mm
Bore Diameter (mm)	260
d _a min.	181 mm
Outer Diameter (mm)	170
d _a - min.	181 mm
r _b - max.	1 mm
r _a - max.	2 mm
D _a - max.	251 mm
r _{1,2} min.	2.1 mm

$r_{3,4}$ min.	1.1 mm
d_1 ?	198.5 mm
D_1 ?	231.5 mm
$r_{3,4}$ - min.	1.1 mm
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	1230 kN
Basic dynamic load rating - C	1230 kN
Fatigue load limit P_u	236 kN
Calculation factor k_r	0.5
Calculation factor - k_r	0.5
Fatigue load limit - P_u	236 kN
Basic static load rating C_0	2120 kN
Basic static load rating - C_0	2120 kN