


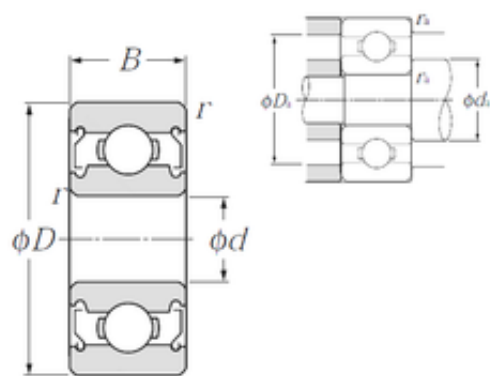

Bearing No. 626ZZ

C	6 mm
d	6 mm
D	19 mm
B	6 mm
Bore	0.236 Inch 6 Millimeter
Noun	Bearing
Weight	9,2 Kg
r min.	0,3 mm
da max	9,5 mm
UNSPSC	31171504
da min.	8 mm
Da max.	17 mm
ra max.	0,3 mm
Category	Single Row Ball Bearing
Snap Ring	No
Enclosure	2 Metal Shields
Inventory	0.0
Size (mm)	6x19x6
Width (mm)	6
bore type:	Round
Weight / LBS	0.018
Product Group	B00308
Inch - Metric	Metric
closure type:	Double Shielded
Cage Material	Steel
bore diameter:	6 mm
overall width:	6 mm
Keyword String	Ball
cage material:	Steel
fillet radius:	0.3 mm

Bearing number	626ZZ
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	6MM Bore; 19MM Outside Diameter; 6MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.236 Inch 6 Millimeter
Outside Diameter	0.748 Inch 19 Millimeter
precision rating:	ISO Class 0
outside diameter:	19 mm
outer ring width:	6 mm
inner ring width:	6 mm
Weight / Kilogram	0.008
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
Bore Diameter (mm)	6
Internal Clearance	C0-Medium
Outer Diameter (mm)	19
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
static load capacity:	885 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	34000 rpm
dynamic load capacity:	2340 N

Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	626ZZ/5C
Internal Special Features	No
(Grease) Lubrication Speed	34 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	2,34 kN
Basic static load rating (C0)	0,885 kN
Maximum Capacity / Filling Slot	No