


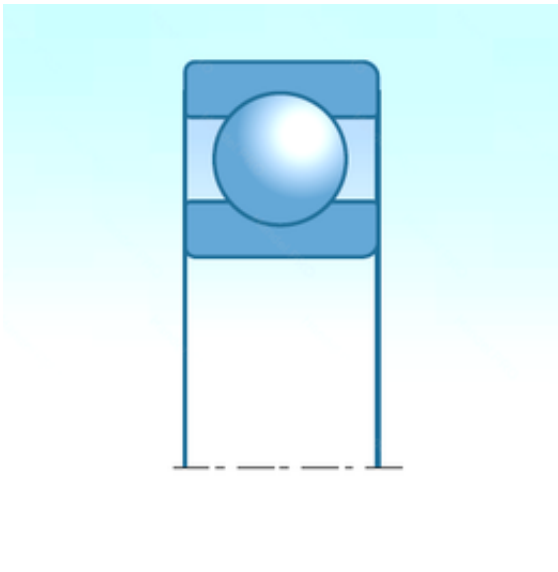

Bearing No. 627LLB

C	7,000 mm
d	7,000 mm
B	7,000 mm
D	22,000 mm
Bore	0.276 Inch 7 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	Micro
Category	Single Row Ball Bearing
Snap Ring	No
Inventory	0.0
Size (mm)	7x22x7
Enclosure	2 Seals
Width (mm)	7,000
bore type:	Round
maximum rpm:	37000 RPM
Cage Material	Steel
closure type:	Double Sealed
Inch - Metric	Metric
Product Group	B00308
bore diameter:	7 mm
overall width:	7 mm
cage material:	Steel
Keyword String	Ball
fillet radius:	0.3 mm
Bearing number	627LLB
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Enclosure Type	Non-Contact Seal

finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	0.866 Inch 22 Millimeter
Outer Race Width	0.276 Inch 7 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	7MM Bore; 22MM Outside Diameter; 7MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; No
bearing material:	High Carbon Chrome Steel
inner ring width:	7 mm
Weight / Kilogram	0
outer ring width:	7 mm
Manufacturer Name	NTN
outside diameter:	22 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	7,000
snap ring included:	Without Snap Ring
internal clearance:	CN
Outer Diameter (mm)	22,000
Minimum Buy Quantity	N/A
maximum rpm (grease):	32000 rpm
row type & fill slot:	Single Row Non-Fill Slot

static load capacity:	1400 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	3350 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No