


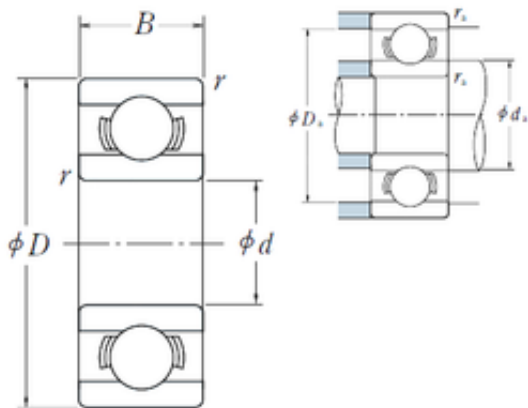

Bearing No. 628

C	8 mm
r	0.3
d	8 mm
D	24 mm
B	8 mm
D_	24
ra	0.3
fo	12.968
da	10
B0	8
Cr	340
B_	8
C0	1.43
Z_	7
D_a	22
DA_	3.969
DE_	20.469
SRE	2.22
C0r	146
SRI	2.04
DI_	12.531
Noun	Bearing
SRIX	0.015
mass	17.2
SREX	0.03
SRIN	-0.015
Bore	0.315 Inch 8 Millimeter
SREN	0
SDM_	16.5
KBRG	6101

yobi	628
Weight	0,0172 Kg
r min.	0,3 mm
LangID	1
UNSPSC	31171504
da min.	10 mm
hidYobi	628
Da max.	22 mm
ra max.	0,3 mm
GRS rpm	28000
Oil rpm	34000
Category	Single Row Ball Bearing
hidTable	ecat_NSESBM
Size (mm)	8x24x8
Inventory	0.0
Enclosure	Open
Snap Ring	No
Width (mm)	8
Prod_Type3	ESM_MD_OT
Weight / LBS	0.03828
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	628
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	0.945 Inch 24 Millimeter
Outer Race Width	0.315 Inch 8 Millimeter
Long Description	8MM Bore; 24MM Outside Diameter; 8MM

	Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.016
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	8
Outer Diameter (mm)	24
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	28 000 r/min
Basic static load rating (C0)	1,43 kN
Basic dynamic load rating (C)	3,35 kN
Maximum Capacity / Filling Slot	No