


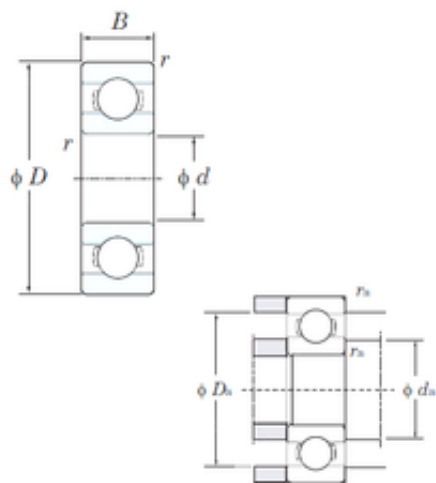

Bearing No. 629

D	26 mm
d	9 mm
B	8 mm
C	8 mm
Cr	5.70
f0	12.4
Cu	0.100
C0r	1.95
Bore	0.354 Inch 9 Millimeter
Noun	Bearing
r(min)	0.6
Weight	0,02 Kg
UNSPSC	31171504
r min.	0,6 mm
r1 min.	0,6 mm
da min.	12,1 mm
ra max.	0,3 mm
da(min)	12.1
Da(max)	22
ra(max)	0.3
Da max.	22 mm
Oil lub.	33000
Category	Single Row Ball Bearing
Size (mm)	9x26x8
Snap Ring	No
Enclosure	Open
Inventory	0.0
Width (mm)	8
Bearing No.	629
Grease lub.	27000

Weight / LBS	0.0441
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	629
Other Features	Deep Groove
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
(Refer.)Mass(g)	20
Manufacturer URL	http://www.koyousa.com
Outside Diameter	1.024 Inch 26 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	9MM Bore; 26MM Outside Diameter; 8MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outer Race Width	0.315 Inch 8 Millimeter
Manufacturer Name	KOYO
Weight / Kilogram	0
Internal Clearance	C0-Medium
Bore Diameter (mm)	9
Outer Diameter (mm)	26
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	33000 r/min
Internal Special Features	No
(Grease) Lubrication	27000 r/min

Speed	
Basic static load rating (C0)	1,95 kN
Basic dynamic load rating (C)	4,55 kN
Maximum Capacity / Filling Slot	No