


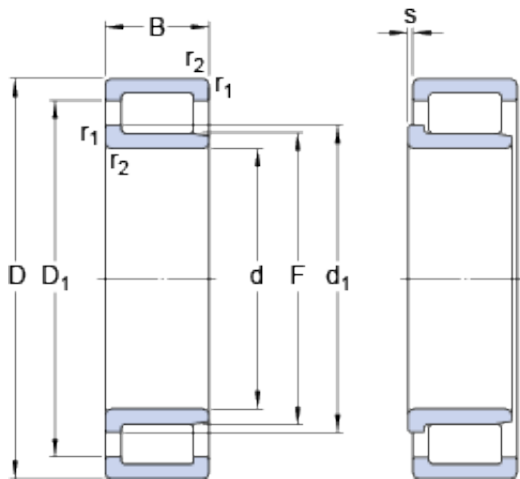

Bearing No. NJG 2313 VH

D	140 mm
d	65 mm
B	48 mm
F	80.7 mm
s	3 mm
s max.	3 mm
Size (mm)	140x65x48
Width (mm)	48
Mass bearing	3.56 kg
d_1	89.9 mm
D_1	116 mm
d_{as}	85.3 mm
Limiting speed	2400 r/min
Bearing number	NJG 2313 VH
d_{as}	85.3 mm
Reference speed	1900 r/min
r_a max.	2 mm
D_a max.	128 mm
d_b max.	78 mm
Bore Diameter (mm)	140
d_a min.	77 mm
Outer Diameter (mm)	65
d_b - max.	78 mm
Calculation factor Y	0.4
Calculation factor e	0.3
r_a - max.	2 mm
D_a - max.	128 mm
$r_{1,2}$ min.	2.1 mm
d_a - min.	77 mm
D_1 ?	116 mm

d_1 ?	89.9 mm
Calculation factor - Y	0.4
Calculation factor - e	0.3
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	303 kN
Basic dynamic load rating - C	303 kN
Fatigue load limit P_u	46.5 kN
Calculation factor k_r	0.35
Calculation factor - k_r	0.35
Fatigue load limit - P_u	46.5 kN
Basic static load rating C_0	360 kN
Basic static load rating - C_0	360 kN