


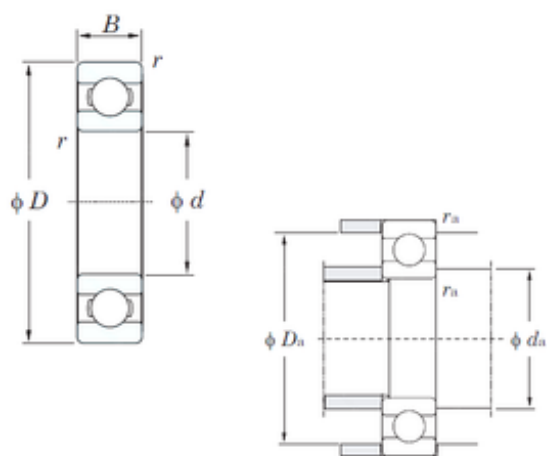

Bearing No. 6308

D	90 mm
d	40 mm
B	23 mm
C	23 mm
f0	13.2
Cu	1.85
Cr	50.9
C0r	24.0
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,633 Kg
r(min)	1.5
r min.	1,5 mm
da min.	48 mm
ra(max)	1.5
Da max.	82 mm
Da(max)	82
da(min)	48
ra max.	1,5 mm
Category	Single Row Ball Bearing
Oil lub.	9200
Inventory	0.0
Enclosure	Open
Size (mm)	40x90x23
Snap Ring	No
Width (mm)	23
Grease lub.	7700
Bearing No.	6308

Weight / LBS	1.51
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6308
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.906 Inch 23 Millimeter
Long Description	40MM Bore; 90MM Outside Diameter; 23MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	3.543 Inch 90 Millimeter
(Refer.)Mass(kg)	0.633
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.686
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	9200 r/min
Manufacturer Item Number	6308
Internal Special Features	No
(Grease) Lubrication Speed	7700 r/min

Basic static load rating (C0)	24 kN
Basic dynamic load rating (C)	40,7 kN
Maximum Capacity / Filling Slot	No