


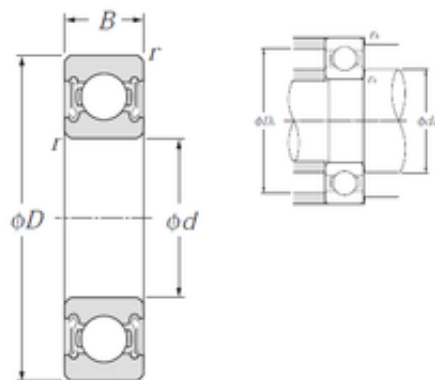

Bearing No. 6308LLB

D	90 mm
d	40 mm
B	23 mm
C	23 mm
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
Weight	0,63 Kg
da max	54 mm
r min.	1,5 mm
UNSPSC	31171504
ra max.	1,5 mm
da min.	48 mm
Da max.	82 mm
Category	Single Row Ball Bearing
Snap Ring	No
Enclosure	2 Seals
Inventory	0.0
Size (mm)	40x90x23
Width (mm)	23
bore type:	Round
Weight / LBS	1.41
Product Group	B00308
Inch - Metric	Metric
closure type:	Double Sealed
Cage Material	Steel
overall width:	23 mm
Enclosure Type	Non-Contact Seal
Keyword String	Ball
Bearing number	6308LLB

bore diameter:	40 mm
fillet radius:	1.5 mm
cage material:	Steel
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	40MM Bore; 90MM Outside Diameter; 23MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.906 Inch 23 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
outside diameter:	90 mm
Weight / Kilogram	0.64
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
inner ring width:	23 mm
precision rating:	ISO Class 0
outer ring width:	23 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
internal clearance:	CN
snap ring included:	Without Snap Ring
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
static load capacity:	24000 N
maximum rpm (grease):	7800 rpm

row type & fill slot:	Single Row Non-Fill Slot
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	40500 N
Manufacturer Item Number	6308LLB
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	7 800 r/min
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	24 kN
Basic dynamic load rating (C)	40,5 kN
Maximum Capacity / Filling Slot	No