


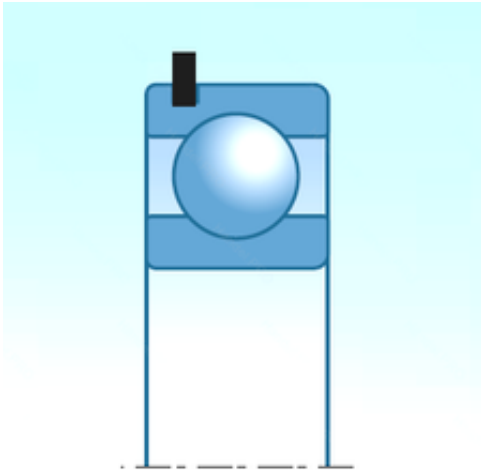

Bearing No. 6308LLUNR

D	90,000 mm
C	23,000 mm
B	23,000 mm
d	40,000 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
UNSPSC	31171504
Category	Single Row Ball Bearing
Enclosure	2 Seals
Snap Ring	Yes
Inventory	0.0
Size (mm)	40x90x23
Width (mm)	23,000
bore type:	Round
Weight / LBS	1.4
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
closure type:	Double Sealed
overall width:	23 mm
cage material:	Steel
bore diameter:	40 mm
fillet radius:	1.5 mm
Keyword String	Ball
Bearing number	6308LLUNR
Enclosure Type	Contact Seal
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated

Long Description	40MM Bore; 90MM Outside Diameter; 23MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	3.543 Inch 90 Millimeter
Outer Race Width	0.906 Inch 23 Millimeter
precision rating:	ISO Class 0
outer ring width:	23 mm
inner ring width:	23 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.635
outside diameter:	90 mm
Bore Diameter (mm)	40,000
Internal Clearance	C3-Loose
Outer Diameter (mm)	90,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	24000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	5300 rpm
dynamic load capacity:	40500 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6308LLUNR/2A
Internal Special	No

Features	
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No