


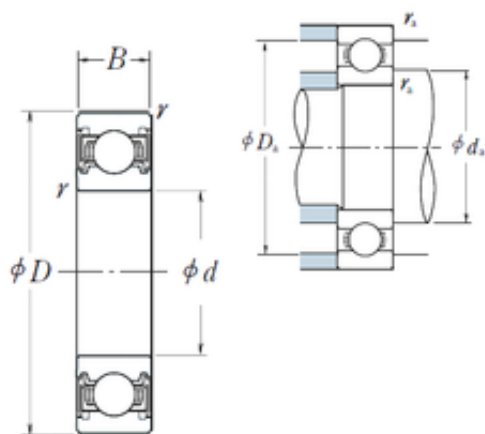

Bearing No. 6821VV

D	130 mm
d	105 mm
B	13 mm
C	13 mm
r	1
Z_	27
B_	13
D_	130
ra	1
C0	23.9
fo	17.4
DI_	110.356
SRI	3.7
D_a	125
DE_	124.644
DA_	7.144
SRE	3.7
SRIN	-0.02
SBRG	18
yobi	6821VV
SDM_	117.5
SREX	0.02
KBRG	6151
bomp	0
mass	0.324
Bore	4.134 Inch 105 Millimeter
SRIX	0.02
SREN	-0.02
Noun	Bearing

ALPHA_	0
da min	110
LangID	1
r min.	1 mm
UNSPSC	31171504
C_conv	19800
da max	110,5 mm
Weight	0,324 Kg
hidYobi	6821VV
Da max.	125 mm
da min.	110 mm
ra max.	1 mm
GRS rpm	4800
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	105x130x13
Width (mm)	13
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.308
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6821VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	5.118 Inch 130 Millimeter
Outer Race Width	0.512 Inch 13

	Millimeter
Long Description	105MM Bore; 130MM Outside Diameter; 13MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.35
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	105
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6821VV
Internal Special Features	No
(Grease) Lubrication Speed	4 800 r/min
Basic static load rating (C0)	23,9 kN
Basic dynamic load rating (C)	19,8 kN
Maximum Capacity / Filling Slot	No