




Bearing No. SL182210

E	81,4 mm
d	50 mm
D	90 mm
B	23 mm
s	1 mm / Axial displacement
m	0,64 kg / Weight
Bore	1.969 Inch 50 Millimeter
Noun	Bearing
Width	0.906 Inch 23 Millimeter
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	No
Inventory	0.0
Separable	No
Size (mm)	50x90x23
Snap Ring	No
Width (mm)	23
Weight / LBS	1.69
Bore Profile	Straight
Cage Material	None
Product Group	B04144
Inch - Metric	Metric
n_G	4750 1/min / Limiting speed
d_1	64,4 mm
D_1	76,7 mm

C_r	109000 N / Dynamic load rating (radial)
Relubricatable	Yes
Other Features	Full Complement 2 Rib Inner Ring 1 Rib Outer Ring with Retaining Ring Operating Temperature From -30 to 120 Deg
Bearing number	SL182210
C_{ur}	18100 N / Fatigue limit load, radial
C_{Or}	111000 N / Static load rating (radial)
r_{min}	1,1 mm
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Long Description	50MM Bore; Straight Bore Profile; 90MM Outside Diameter; 23MM Width; RBEC 1 ISO P0; Single Row; Not Separable; No Snap Ring; Relubricatable; C0-Medium Internal Clearance; No Retainer
Manufacturer URL	http://www.ina.com
Outside Diameter	3.543 Inch 90 Millimeter
Weight / Kilogram	0.767
Manufacturer Name	SCHAEFFLER GROUP
Internal Clearance	C0-Medium
Bore Diameter (mm)	50
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.50.00.00
Manufacturer Item	SL182210

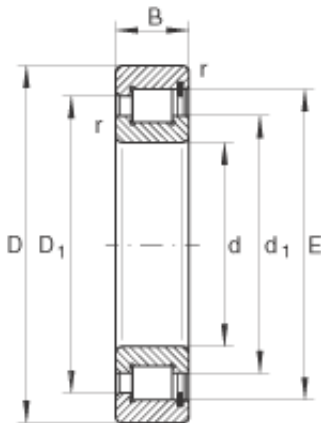

Number	
Number of Rows of Rollers	Single Row