


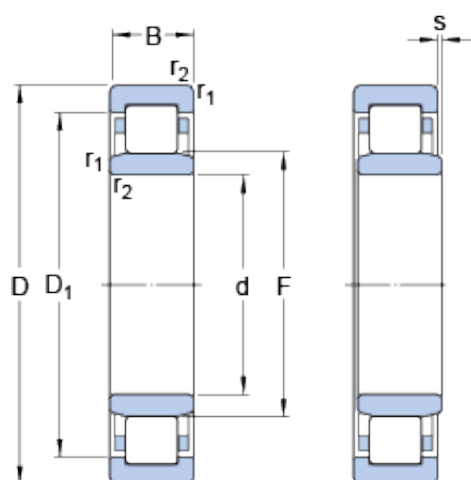

Bearing No. NU 3076 ECMP

s	8.5 mm
d	380 mm
D	560 mm
B	135 mm
F	425 mm
s max.	8.5 mm
Size (mm)	560x380x135
Width (mm)	135
Mass bearing	109 kg
D_1	506 mm
Limiting speed	1800 r/min
Bearing number	NU 3076 ECMP
Reference speed	1000 r/min
Limiting value e	0.3
Bore Diameter (mm)	560
r_a max.	4 mm
D_a max.	542 mm
d_b min.	430 mm
d_a max.	417 mm
d_a min.	398 mm
Axial load factor Y	0
Outer Diameter (mm)	380
d_a - max.	417 mm
d_a - min.	398 mm
r_a - max.	4 mm
$r_{1,2}$ min.	5 mm
D_a - max.	542 mm
d_b - min.	430 mm
D_1 ?	506 mm
$r_{1,2}$ - min.	5 mm

Basic dynamic load rating C	2380 kN
Basic dynamic load rating - C	2380 kN
Fatigue load limit P_u	400 kN
Calculation factor k_r	0.17
Calculation factor - k_r	0.17
Fatigue load limit - P_u	400 kN
Basic static load rating C_0	4750 kN
Basic static load rating - C_0	4750 kN