


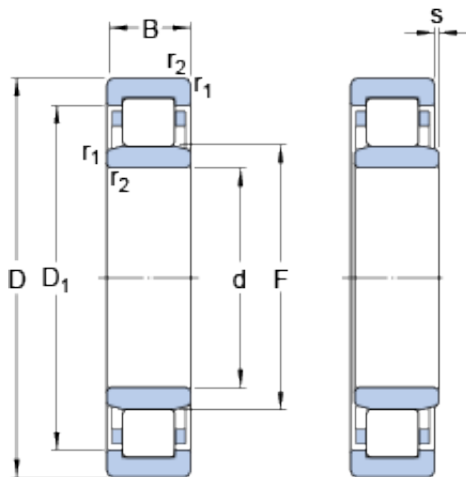

Bearing No. NU 30/600 ECMA/HA1

s	14.5 mm
d	600 mm
D	870 mm
B	200 mm
F	661 mm
s max.	14.5 mm
Size (mm)	870x600x200
Width (mm)	200
Mass bearing	420 kg
D_1	796 mm
Limiting speed	900 r/min
Bearing number	NU 30/600 ECMA/HA1
Reference speed	600 r/min
Limiting value e	0.3
Bore Diameter (mm)	870
r_a max.	5 mm
D_a max.	847 mm
d_b min.	667 mm
d_a max.	655 mm
d_a min.	623 mm
Axial load factor Y	0
Outer Diameter (mm)	600
d_a - max.	655 mm
d_a - min.	623 mm
r_a - max.	5 mm
$r_{1,2}$ min.	6 mm
D_a - max.	847 mm
d_b - min.	667 mm
D_1 ?	796 mm
$r_{1,2}$ - min.	6 mm

Basic dynamic load rating C	5390 kN
Basic dynamic load rating - C	5390 kN
Fatigue load limit P_u	780 kN
Calculation factor k_r	0.17
Calculation factor - k_r	0.17
Fatigue load limit - P_u	780 kN
Basic static load rating C_0	11000 kN
Basic static load rating - C_0	11000 kN