


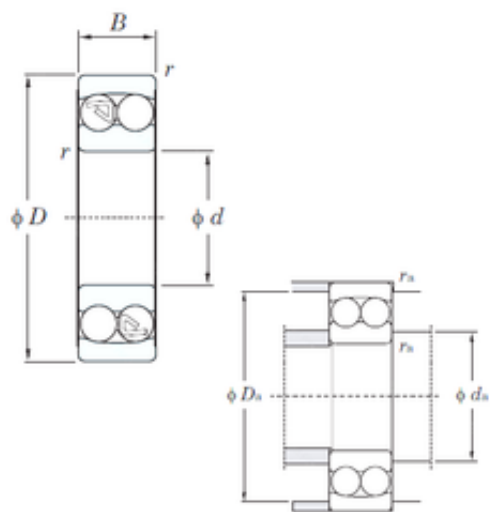

Bearing No. 1306

D	72 mm
d	30 mm
B	19 mm
C	19 mm
e	0.26
Y1	2.40
Y0	2.52
Y2	3.72
Cr	21.3
Cu	0.40
C0r	6.30
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
r(min)	1.1
UNSPSC	31171532
r min.	1.1 mm
Weight	0.387 Kg
ra(max)	1
Da(max)	65.5
da(min)	36.5
ra max.	1 mm
da min.	36.5 mm
Da max.	65.5 mm
Oil lub.	11000
Category	Self Aligning Ball Bearings
Inventory	0.0
Enclosure	Open
Size (mm)	30x72x19
Width (mm)	19

Grease lub.	8700
Bearing No.	1306
Weight / LBS	0.85319
Product Group	B00152
Cage Material	Steel
Inch - Metric	Metric
Other Features	Allowable Misalignment 3 Deg
Keyword String	Self Aligning
Bearing number	1306
Precision Class	ABEC 1 ISO P0
Mounting Method	Shaft
Rolling Element	Ball Bearing
(Refer.)Mass(kg)	0.387
Manufacturer URL	http://www.koyousa.com
Outer Race Width	0.748 Inch 19 Millimeter
Inner Race Width	0.748 Inch 19 Millimeter
Outside Diameter	2.835 Inch 72 Millimeter
Long Description	30MM Bore; Shaft Mount; 72MM Outside Diameter; 19MM Inner Race Width; 19MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Manufacturer Name	KOYO
Weight / Kilogram	0.412
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A

Calculation factor (e)	0.26
Harmonized Tariff Code	8482.10.50.68
Calculation factor (Y1)	2.40
Calculation factor (Y0)	2.52
(Oil) Lubrication Speed	11000 r/min
Number of Rows of Balls	Double Row
Manufacturer Item Number	1306
(Grease) Lubrication Speed	8700 r/min
Basic static load rating (C0)	6.30 kN
Basic dynamic load rating (C)	21.3 kN