


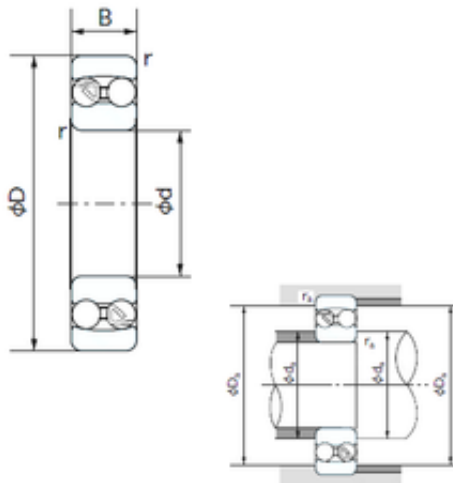

Bearing No. 1306

D	72 mm
d	30 mm
B	19 mm
C	19 mm
Noun	Bearing
Bore	1.181 Inch 30 Millimeter
Weight	0.387 Kg
UNSPSC	31171532
Da max.	65.5 mm
ra max.	1.0 mm
r1 min.	1.1 mm
da min.	36.5 mm
Category	Self Aligning Ball Bearings
Enclosure	Open
Size (mm)	30x72x19
Inventory	0.0
Width (mm)	19
Weight / LBS	0.85319
Product Group	B00152
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Self Aligning
Other Features	Allowable Misalignment 3 Deg
Bearing number	1306
Precision Class	ABEC 1 ISO P0
Mounting Method	Shaft
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nachi.com

Long Description	30MM Bore; Shaft Mount; 72MM Outside Diameter; 19MM Inner Race Width; 19MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Outside Diameter	2.835 Inch 72 Millimeter
Outer Race Width	0.748 Inch 19 Millimeter
Inner Race Width	0.748 Inch 19 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Calculation factor (e)	0.26
Number of Rows of Balls	Double Row
Calculation factor (Y1)	2.40
Calculation factor (Y0)	2.52
(Oil) Lubrication Speed	11000 r/min
(Grease) Lubrication Speed	9000 r/min
Basic static load rating (C0)	6,3 kN
Basic dynamic load rating (C)	21,3 kN