


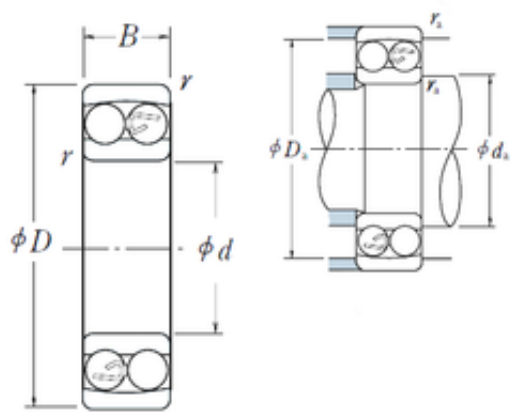

Bearing No. 1306

r	1.1
d	30 mm
D	72 mm
B	19 mm
C	19 mm
e	0.26
Y0	2.5
X1	1
B_	19
ra	1
Y2	3.7
D_	72
Y3	2.4
C0	6.3
X0	1
da	36.5
X2	0.65
PCD	51.7
D_a	65.5
SRI	5
SRE	0
mass	0.385
CAng	9.983
KBRG	1352
yobi	1306
SREX	0
SRIX	0.04
SRIN	0
SREN	0
r min.	1,1 mm

Weight	0,385 Kg
LangID	1
GRS rpm	8500
cyl dia	9.525
Oil rpm	11000
hidYobi	1306
da min.	36,5 mm
Da max.	65,5 mm
ra max.	1 mm
hidTable	ecat_NSSAB
cyl count	13
Size (mm)	30x72x19
Prod_Type3	SABB_SA_CB
Width (mm)	19
groove inner	42.167
groove outer	62.02
Bearing number	1306
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Calculation factor (e)	0,26
(Oil) Lubrication Speed	11 000 r/min
Calculation factor (Y0)	2,5
Calculation factor (Y2)	3,7
(Grease) Lubrication Speed	8 500 r/min
Basic static load rating (C0)	6,3 kN
Basic dynamic load rating (C)	21,4 kN