


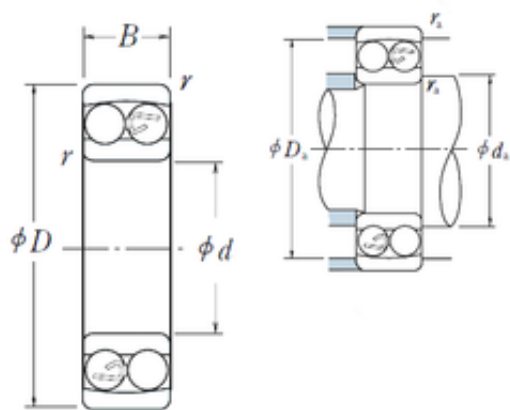

Bearing No. 2222

r	2.1
d	110 mm
D	200 mm
B	53 mm
C	53 mm
e	0.28
Y0	2.3
X1	1
B_	53
ra	2
Y2	3.5
D_	200
Y3	2.2
C0	51.5
X0	1
da	121
X2	0.65
PCD	155
D_a	189
SRI	12.86
SRE	0
mass	6.51
CAng	10.633
KBRG	1354
yobi	2222
SREX	0
SRIX	0.08
SRIN	0
SREN	0
r min.	2,1 mm

Weight	6,64 Kg
LangID	1
GRS rpm	2800
cyl dia	23.812
Oil rpm	3400
hidYobi	2222
da min.	121 mm
Da max.	189 mm
ra max.	2 mm
hidTable	ecat_NSSAB
cyl count	18
Size (mm)	110x200x53
Prod_Type3	SABB_SA_CB
Width (mm)	53
groove inner	131.154
groove outer	181.52
Bearing number	2222
Bore Diameter (mm)	110
Outer Diameter (mm)	200
Calculation factor (e)	0,28
(Oil) Lubrication Speed	3 400 r/min
Calculation factor (Y0)	2,3
Calculation factor (Y2)	3,5
(Grease) Lubrication Speed	2 800 r/min
Basic static load rating (C0)	51,5 kN
Basic dynamic load rating (C)	122 kN