




Bearing No. AXK120155

D	155 mm
d	120 mm
T	4 mm
Eb	125.0 mm
Cu	63.5
Ca	98.5
D1	-
Dw	4
Dc	155
Ea	153.0 mm
C0a	650
Dc1	120
Noun	Roller Assembly
D,d1	155
h(mm)	-
a(mm)	-
Bore 2	4.724 Inch 120 Millimeter
Banded	No
Height	0.157 Inch 4 Millimeter
UNSPSC	31171500
Bore 1	4.724 Inch 120 Millimeter
Weight	0.126 Kg
h1(mm)	1.00
ra max.	0.6 mm
rs(min)	-
ra(max)	0.6
Category	Thrust Roller Bearings
Oil lub.	2700
Inventory	0.0

Size (mm)	120x155x4
Width (mm)	4
Bearing No.	AXK120155
Weight / LBS	0.278
Self Aligning	No
Product Group	B04144
Cage Material	Steel
Inch - Metric	Metric
Bearing number	AXK120155
Thrust Bearing	Yes
Other Features	Single Row One Piece Cage
Keyword String	Thrust Needle
Rolling Element	Needle Roller Bearing
Precision Class	ABEC 1 ISO P0
Long Description	120MM Bore 1; 120MM Bore 2; 155MM Outside Diameter; 4MM Height; Needle Roller Bearing; Single Direction; Not Self Aligning; Not Banded; Steel Cage; ABEC 1 ISO P0; Roller Assembly Only
Outside Diameter	6.102 Inch 155 Millimeter
Manufacturer URL	http://www.koyousa.com
(Refer.)Mass(kg)	-
Weight / Kilogram	0.13
Manufacturer Name	KOYO
Washer designation	-
Bore Diameter (mm)	120
Outer Diameter (mm)	155
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Only

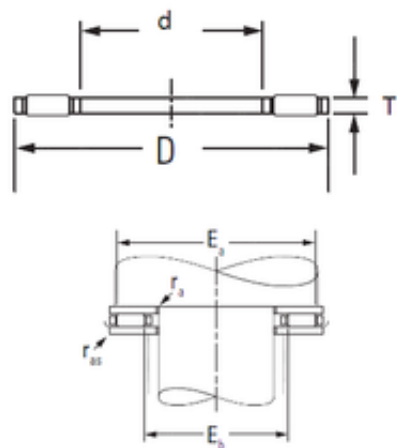

Harmonized Tariff Code	8482.99.25.40
Manufacturer Item Number	AXK120155
Single or Double Direction	Single Direction
Basic static load rating (C0)	650 kN
Basic dynamic load rating (C)	98.5 kN
Washer designation Shaft piloted	-
Overall Height with Aligning Washer	0 Inch 0 Millimeter
Washer designation Housing piloted	-