


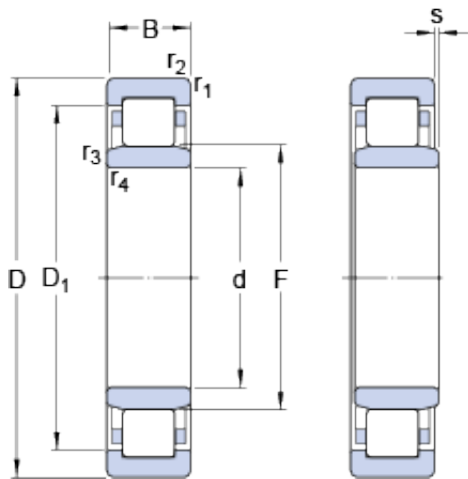

Bearing No. NU 2315 ECML

s	4.8 mm
d	75 mm
D	160 mm
B	55 mm
F	95 mm
s max.	4.8 mm
Size (mm)	160x75x55
Width (mm)	55
Mass bearing	5.43 kg
D ₁	135.75 mm
Limiting speed	8000 r/min
Bearing number	NU 2315 ECML
Reference speed	4500 r/min
Limiting value e	0.3
d _a max.	92 mm
d _a min.	87 mm
Bore Diameter (mm)	160
r _a max.	2 mm
D _a max.	148 mm
r _b max.	2 mm
d _b min.	97 mm
Axial load factor Y	0.4
Outer Diameter (mm)	75
r _b - max.	2 mm
r _a - max.	2 mm
r _{1,2} min.	2.1 mm
d _a - min.	87 mm
D _a - max.	148 mm
d _b - min.	97 mm
d _a - max.	92 mm

$r_{3,4}$ min.	2.1 mm
D_1 ?	135.75 mm
$r_{3,4}$ - min.	2.1 mm
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	380 kN
Basic dynamic load rating - C	380 kN
Fatigue load limit P_u	50 kN
Calculation factor k_r	0.38
Calculation factor - k_r	0.38
Fatigue load limit - P_u	50 kN
Basic static load rating C_0	400 kN
Basic static load rating - C_0	400 kN