


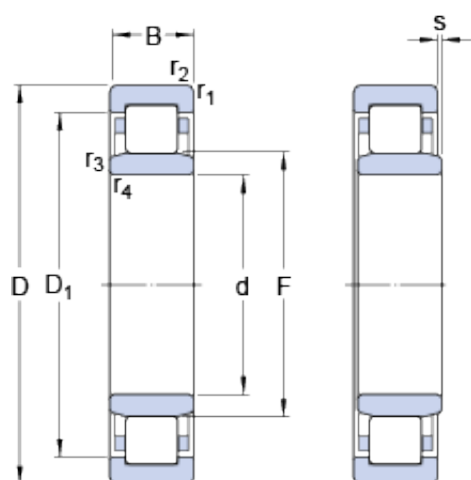

Bearing No. NU 2210 ECPH

s	1.5 mm
d	50 mm
D	90 mm
B	23 mm
F	59.5 mm
s max.	1.5 mm
Size (mm)	90x50x23
Width (mm)	23
Mass bearing	0.56 kg
D_1	77.4 mm
Limiting speed	9000 r/min
Bearing number	NU 2210 ECPH
Reference speed	8500 r/min
Limiting value e	0.3
d_a max.	57.5 mm
d_a min.	57 mm
Bore Diameter (mm)	90
r_a max.	1 mm
D_a max.	82.4 mm
r_b max.	1 mm
d_b min.	61 mm
Axial load factor Y	0.4
Outer Diameter (mm)	50
r_b - max.	1 mm
r_a - max.	1 mm
$r_{1,2}$ min.	1.1 mm
d_a - min.	57 mm
D_a - max.	82.4 mm
d_b - min.	61 mm
d_a - max.	57.5 mm

$r_{3,4}$ min.	1.1 mm
D_1 ?	77.4 mm
$r_{3,4}$ - min.	1.1 mm
$r_{1,2}$ - min.	1.1 mm
Basic dynamic load rating C	90 kN
Basic dynamic load rating - C	90 kN
Fatigue load limit P_u	11.4 kN
Calculation factor k_r	0.2
Calculation factor - k_r	0.2
Fatigue load limit - P_u	11.4 kN
Basic static load rating C_0	88 kN
Basic static load rating - C_0	88 kN