


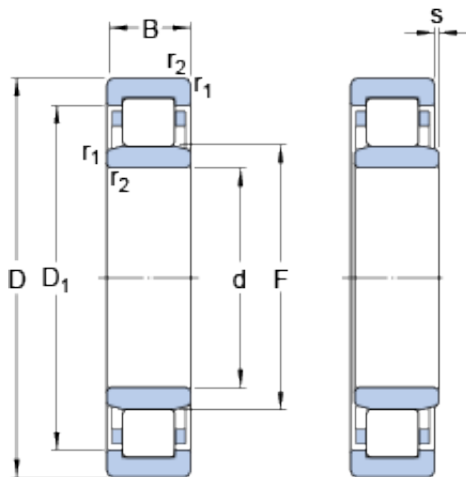

Bearing No. NU 19/600 ECMA/HA1

s	4.5 mm
d	600 mm
D	800 mm
B	90 mm
F	649 mm
s max.	4.5 mm
Size (mm)	800x600x90
Width (mm)	90
Mass bearing	130 kg
D_1	740 mm
Limiting speed	950 r/min
Bearing number	NU 19/600 ECMA/HA1
Reference speed	750 r/min
Limiting value e	0.2
Bore Diameter (mm)	800
r_a max.	4 mm
D_a max.	782 mm
d_b min.	655 mm
d_a max.	642 mm
d_a min.	618 mm
Axial load factor Y	0
Outer Diameter (mm)	600
d_a - max.	642 mm
d_a - min.	618 mm
r_a - max.	4 mm
$r_{1,2}$ min.	5 mm
D_a - max.	782 mm
d_b - min.	655 mm
D_1 ?	740 mm
$r_{1,2}$ - min.	5 mm

Basic dynamic load rating C	1900 kN
Basic dynamic load rating - C	1900 kN
Fatigue load limit P_u	270 kN
Calculation factor k_r	0.07
Calculation factor - k_r	0.07
Fatigue load limit - P_u	270 kN
Basic static load rating C_0	3800 kN
Basic static load rating - C_0	3800 kN