




Bearing No. SL024912

	NNCL4912V / Designation to DIN 5412
E	77,51 mm
m	0,47 kg / Weight
d	60 mm
D	85 mm
B	25 mm
C	12,5 mm
s	1 mm / Axial displacement
Bore	2.362 Inch 60 Millimeter
Noun	Bearing
Width	0.984 Inch 25 Millimeter
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Retainer	No
Category	Cylindrical Roller Bearing
Size (mm)	60x85x25
Inventory	0.0
Snap Ring	No
Separable	Outer Ring - Both Sides
Width (mm)	25
Weight / LBS	1.241
Bore Profile	Straight
Cage Material	None
Product Group	B04144
Inch - Metric	Metric
n_G	4650 1/min / Limiting

	speed
d_1	70,3 mm
C_r	70000 N / Dynamic load rating (radial)
Relubricatable	Yes
Other Features	Full Complement 3 Rib Inner Ring Plain Outer Ring Operating Temperature From -30 to 120 Deg
Bearing number	SL024912
C_{ur}	17300 N / Fatigue limit load, radial
C_{0r}	121000 N / Static load rating (radial)
r_{min}	1 mm
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Long Description	60MM Bore; Straight Bore Profile; 85MM Outside Diameter; 25MM Width; RBEC 1 ISO P0; Double Row; Outer Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Internal Clearance; No Reta
Manufacturer URL	http://www.ina.com
Outside Diameter	3.346 Inch 85 Millimeter
Weight / Kilogram	0.563
Manufacturer Name	SCHAEFFLER GROUP
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Outer Diameter (mm)	85

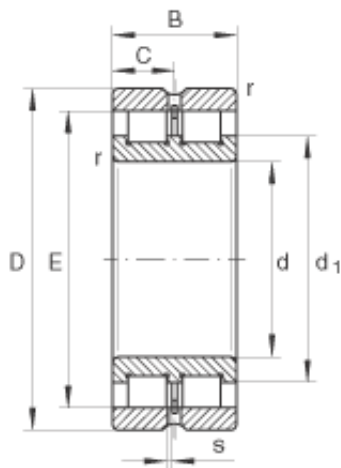

Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.50.00.00
Manufacturer Item Number	SL024912
Number of Rows of Rollers	Double Row